

Overview

HP Z8 G4 Workstation



Front view

1. Integrated Front Handle	5. Front I/O Entry: 4 USB 3.1 Gen1 (Left-most Port has Charging Capability)
2. Dedicated 9.5mm Optical Drive Bay	Front I/O Premium: 2x USB 3.1 Gen1, 2x USB 3.1 Gen2 Type-C™ (Left-most Type-A Port has Charging Capability)
3. Power Button	NOTE: Premium Front IO is shown on Photography
4. HDD Activity LED	6. Media Card Reader
	7. 1 Headset

Overview



Internal view

- 8. 24 DIMM Slots for DDR4 ECC Memory
- 9. 2 External 5.25" Bays and Slimline Optical
- 10. 4 Internal 3.5" Bays
- 11. 2 Intel® Xeon® Processors (Skylake SP) family
- 12.
 - Slot 1: PCIe Gen3 x4 - Transforms to PCIe Gen3 x8 when 2nd CPU is installed
 - Slot 2: PCIe Gen3 x16
 - Slot 3: PCIe Gen3 x16 - Available ONLY when 2nd processor is installed
 - Slot 4: PCIe Gen3 x16
 - Slot 5: PCIe Gen3 x4
 - Slot 6: PCIe Gen3 x16 - Available ONLY when 2nd processor is installed
 - Slot 7: PCIe Gen3 x4
- 13. 2 sSATA, 8 SATA (AHCI) Ports
- 14. 3 USB 2.0 Internal Ports, 1 USB 3.0 Gen1 Internal Port

Overview



Rear view

15. Choice of 1125W or 1450W, 90% Efficient Power Supplies
16. Rear I/O:
 - Rear Power Button
 - 6 USB 3.1 Gen1
 - 1 Serial
 - PS/2 keyboard and mouse
 - 2 RJ-45 to integrated Gigabit LAN
 - 1 Audio Line-In (can be retasked as microphone)
 - 1 Audio Line-Out
17. Optional: 2 10GbE LAN ports

Overview

Overview

Form Factor

Tower

Operating Systems

Preinstalled:

- Windows 11 Pro for Workstations²
- Windows 10 Pro for Workstations^{1,2}
- Ubuntu 20.04 LTS³
- HP Linux-ready (minimal OS ready for customer OS installation)
- Red Hat® Enterprise Linux® Desktop Workstation (Paper license with 1-year support; no preinstalled OS)

Supported:

- Red Hat® Enterprise Linux® Workstation 6, 7, 8⁴
- SUSE Linux® Enterprise Desktop 12, 15⁴
- Ubuntu 16.04, 18.04, 20.04 LTS³

¹ Device comes with Windows 10 and a free Windows 11 upgrade or may be preloaded with Windows 11. Upgrade timing may vary by device. Features and app availability may vary by region. Certain features require specific hardware (see Windows 11 Specifications).

²Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

³ Not all features are available in all editions or versions of Ubuntu. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS to take full advantage of Ubuntu functionality. Ubuntu may be automatically updated. ISP fees may apply, and additional requirements may apply over time for updates.

⁴**Notes:** For detailed Linux® OS/hardware support information, see:

http://www.hp.com/support/linux_hardware_matrix

NOTE: In accordance with Microsoft's support policy, HP does not support the Windows® 7 operating system on products configured with Intel® 7th Generation and forward processors.

Available Processors

Name	Cores	Clock Speed (GHz)	Cache (MB)	Memory Speed (MT/s)	Hyper-Threading	Intel® Turbo Boost Technology ¹	Supports Intel® DCPMM® Technology ²	TDP (W)
Intel® Xeon® Platinum 8260L processor	24	2.4 GHz	35.75	2933	YES	3.1, 3.9	YES	165
Intel® Xeon® Gold 6258R processor	28	2.7 GHz	38.50	2933	YES	4.0, 3.4	YES	205
Intel® Xeon® Gold 6248R processor	24	3.0 GHz	35.75	2933	YES	4.0, 3.6	YES	205
Intel® Xeon® Gold 6246R processor	16	3.4 GHz	35.75	2933	YES	4.1, 4.0	YES	205
Intel® Xeon® Gold 6244 processor	8	3.6 GHz	24.75	2933	YES	4.3, 4.4	YES	150
Intel® Xeon® Gold 6242R processor	20	3.1 GHz	35.75	2933	YES	4.1, 3.8	YES	205
Intel® Xeon® Gold 6242 processor	16	2.8 GHz	22	2933	YES	3.5, 3.9	YES	150
Intel® Xeon® Gold 6240 processor	18	2.6 GHz	24.75	2933	YES	3.3, 3.9	YES	150
Intel® Xeon® Gold 6238R processor	28	2.2 GHz	38.5	2933	YES	4.0, 3.0	YES	165
Intel® Xeon® Gold 6234 processor	8	3.3 GHz	24.75	2933	YES	4.0	YES	130
Intel® Xeon® Gold 6230R processor	26	2.1 GHz	35.75	2933	YES	4.0, 3.0	YES	150

Overview

Intel® Xeon® Gold 6226R processor	16	2.9 GHz	22	2933	YES	3.9, 3.6	YES	150
Intel® Xeon® Gold 6226 processor	12	2.7 GHz	19.25	2933	YES	3.5, 3.7	YES	125
Intel® Xeon® Gold 6136 processor	12	3.0 GHz	24.75	2666	YES	3.6, 3.7	NO	150
Intel® Xeon® Gold 6128 processor	6	3.4GHz	19.25	2666	YES	3.7, 3.7	NO	115
Intel® Xeon® Gold 5222 processor	4	3.8 GHz	16.5	2933	YES	3.9, 3.9	YES	105
Intel® Xeon® Gold 5220R processor	24	2.2 GHz	35.75	2666	YES	4.0, 2.9	YES	150
Intel® Xeon® Gold 5218R processor	20	2.1 GHz	27.5	2666	YES	4.0, 2.9	YES	125
Intel® Xeon® Gold 5218 processor	16	2.3 GHz	22	2666	YES	2.8, 3.9	YES	125
Intel® Xeon® Gold 5118 processor	12	2.3 GHz	16.50	2400	YES	2.7, 3.2	NO	105
Intel® Xeon® Silver 4216 processor	16	2.1 GHz	22	2400	YES	2.7, 3.2	NO	100
Intel® Xeon® Silver 4215R processor	8	3.2 GHz	11	2400	YES	4.0, 3.6	YES	130
Intel® Xeon® Silver 4214R processor	12	2.4 GHz	16.5	2400	YES	3.0, 3.5	NO	100
Intel® Xeon® Silver 4214 processor	12	2.2 GHz	16.5	2400	YES	2.7, 3.2	NO	85
Intel® Xeon® Silver 4210R processor	10	2.4 GHz	13.75	2400	YES	2.9, 3.2	NO	100
Intel® Xeon® Silver 4210 processor	10	2.2 GHz	13.75	2400	YES	2.7, 3.2	NO	85
Intel® Xeon® Silver 4208 processor	8	2.1 GHz	11	2400	YES	2.5, 3.2	NO	85
Intel® Xeon® Silver 4114 processor	10	2.2 GHz	13.75	2400	YES	2.5, 3.0	NO	85
Intel® Xeon® Silver 4108 processor	8	1.8 GHz	11.00	2400	YES	2.1, 3.0	NO	85
Intel® Xeon® Bronze 3206R processor	8	1.9 GHz	11.00	2133	YES	N/A	NO	85
Intel® Xeon® Bronze 3204 processor	6	1.9 GHz	8.25	2133	YES	N/A	NO	85
	All Z8G4 Intel® Xeon® CPUs Feature Intel® vPro™ Technology.							
	<p>¹The specifications shown in this column represent the following: (all core maximum turbo steps, one core maximum turbo steps). Turbo boost stepping occurs in 100MHz increments. Processors that do not have turbo functionality are denoted as N/A.</p>							

Available Processors

Disclaimers

When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families.

Multicore is designed to improve performance of certain software products. Not all customers or software

Overview

applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

Color

Black

Convertibility

No

Expansion Slots (see system board section for more details)

Slot 1: PCIe Gen3 x4 - Transforms to PCIe Gen3 x8 when 2nd CPU is installed

Slot 2:

PCIe Gen3 x16

Slot 3:

PCIe Gen3 x16 - Available ONLY when 2nd processor is installed

Slot 4:

PCIe Gen3 x16

Slot 5:

PCIe Gen3 x4

Slot 6:

PCIe Gen3 x16 - Available ONLY when 2nd processor is installed

Slot 7:

PCIe Gen3 x4

NOTE: The PCIe x4 and PCIe x8 connectors above are open ended, allowing a PCIe x16 card to be seated in the slot.

Expansion Bays (see storage section for more details)

4 internal 3.5" bays (All 4 include acoustic dampening rail assemblies)
2 external 5.25" bays (175mm depth limit)
1 dedicated 9.5mm slim optical disk drive bay

Front I/O

- Base: 4 USB 3.1 Gen1 Type-A connector. Left most connector has charging capability, 1 Combo Headset, 1 Optional Media Card Reader
- Premium: 2 USB 3.1 Gen1 Type-A connector. Left most connector has charging capability, 2 USB 3.1 Gen2 Type-C™ connector, 1 Combo Headset, 1 Optional Media Card Reader

Internal I/O

Internal Slot 1 CPU1: PCIe Gen3 x8 - always available
Internal Slot 2 CPU2: PCIe Gen3 x8 - available when 2nd CPU is installed
2 USB 2.0 ports available with a single 2x5 header
1 USB 2.0 port available with a 1x6 header
1 USB 3.1 Gen1 and 1 USB 2.0 port available with a 2x6 header

Notes: The 2x5 header can be converted to a standard (Type-A) USB 2.0 connector through the use of one HP Internal USB Port Kit (EM165AA). This port kit uses one half of the 2x5 header.

The 1x6 header can be converted to a standard (Type-A) USB 2.0 connector through the use of one HP Internal USB Port Kit (EM165AA). This port kit uses 5 pin positions on the header.

The 2x6 header can be converted to a standard (Type-A) USB 2.0 connector

Overview

through the use of one HP Internal USB Port Kit (EM165AA). This port kit uses one half of the 2x6 header.

Rear I/O	6 USB 3.1 Gen1 (aka USB 3.0), 1 Serial, PS/2 keyboard and mouse, 2 RJ-45 to integrated Gigabit LAN, 1 Audio Line-In (can be retasked as microphone), 1 Audio Line-Out
	Optional: 2 RJ-45 to 10GbE LAN ports
Interfaces Supported	10 channel SATA 6.0 Gb/s interface Factory integrated RAID available for SATA drives (RAID 0, 1 and 10) Internal USB 3.1 Gen1, USB 3.1 Gen2, USB 2.0
On-board RAID Support	SATA RAID 0 Striped Array SATA RAID 1 Mirrored Array SATA RAID 10 Striped/Mirrored SATA RAID 5 Parity Array
Chassis Dimensions (H x W x D)	Footprint: H: 17.5" [444.5mm] W: 8.5" [215.9mm] D: 21.7" [551.2mm] (measured to the rear of service panel) Maximum: H: 17.5" [444.5mm] W: 8.5" [215.9mm] D: 21.85" [555.2mm] (measured to the embossment for the rear chassis fans)
Packaged Dimensions	H: 25" (636mm) W: 13.1" (332mm) D: 28.9" (734mm)
Palletization Profile	4 units x 3 layers = 12 units per pallet 1200x1000x2034mm (pallet included)
Rack Dimensions	5U
Weight	Exact weights depend upon configuration (System weight only). Minimum: 22.4kg (49.4lbs.) Typical: 23.7kg (52.2lbs.) Maximum: 31.7kg (70lbs.)
Temperature	Operating: 5° to 35°C (40° to 95°F) Non-operating: -40° to 60°C (-40° to 140°F)
Humidity	Operating: 10% to 85% RH, non-condensing, 35° C maximum wet bulb Non-operating: 10% to 90%, non-condensing, 35° C maximum wet bulb
Maximum Altitude (non-pressurized)	Operating (with Rotational Hard Drives): 3,048 m (10,000 feet) Operating (with only Solid-State Drives): 5,000 m (16,404 feet) Non-operating: 12,192 m (40,000ft) NOTE: Above 1524 m (5,000 feet) altitude, maximum operating temperature is reduced by 1° C (1.8° F) per 305 m (1,000 feet) increase in elevation.
Power Supply	Choice of: 1125W/100V/15A 90% Efficient wide-ranging, active Power Factor Correction The power delivery system includes four 6+2-pin graphics power cables. 1450W/200V/10A 90% Efficient wide-ranging, active Power Factor Correction The power delivery system includes four 6+2-pin graphics power cables. - Available in limited regions

Overview

1450W/100V/20A 90% Efficient wide-ranging, active Power Factor Correction
The power delivery system includes four 6+2-pin graphics power cables.

1700W/200V/10A 90% Efficient wide-ranging, active Power Factor Correction
The power delivery system includes four 6+2-pin graphics power cables.

NOTE: All power cords supplied by HP for Desktop Workstations are between 1.83m and 2.5m (dependent on country localization and platform).

Notes: The 1125W/100V/15A (1450W at 200V Input Voltage) power supply can also supply 1275W of output power when the input voltage is greater than 105V. If the input voltage is less than 105V, but greater than 90V for any reason, the maximum power that can be drawn is 1125W. An uninterruptible power supply (UPS) is highly recommended if 1275W output power is desired.

The 1125W Power Supply can also supply 1450W of output power when the input voltage is greater than 200V under all conditions.

The 1450W/100V/20A (1700W at 200V Input Voltage) power supply can also supply 1550W of output power when the input voltage is greater than 105V. If the input voltage is less than 105V, but greater than 90V for any reason, the maximum power that can be drawn is 1450W. An uninterruptible power supply (UPS) is highly recommended if 1550W output power is desired.

The 1450W Power Supply can also supply 1700W of output power when the input voltage is greater than 200V under all conditions.

The 1450W/100V/20A chassis is shipped with a 20A power cord and requires a 20A outlet in an environment with 100V/110V. Site modification may be required. Check with your sales lead and click here for the [Site Prep Guide](#).

The Z8 G4 power supply efficiency reports can be found at these links:

1125W - Link:

https://plugloadsolutions.com/psu_reports/HP%20Inc_DPS-1125BB%20A_1125W_ECOS%204825_Report.pdf

1450W - Link:

https://plugloadsolutions.com/psu_reports/HP%20Inc_DPS-1450AB%20A_1450W_ECOS%204826_Report.pdf

Workstation ISV Certifications

See the latest list of certifications at

<http://www.hp.com/united-states/campaigns/workstations/partnerships.html>

Supported Components

Processors

Intel® Xeon® processor Scalable family

Intel® Xeon® Platinum 8260L processor	Y	Y	170R
Intel® Xeon® Gold 6258R processor	Y	Y	9VA9
Intel® Xeon® Gold 6248R processor	Y	Y	9VA9
Intel® Xeon® Gold 6246R processor	Y	Y	9VA9
Intel® Xeon® Gold 6244 processor	Y	Y	5YZ4
Intel® Xeon® Gold 6242R processor	Y	Y	9VA9
Intel® Xeon® Gold 6242 processor	Y	Y	5YZ4
Intel® Xeon® Gold 6240 processor	Y	Y	5YZ4
Intel® Xeon® Gold 6238R processor	Y	Y	9VA8
Intel® Xeon® Gold 6234 processor	Y	Y	5YZ4
Intel® Xeon® Gold 6230R processor	Y	Y	9VA8
Intel® Xeon® Gold 6226R processor	Y	Y	9VA8
Intel® Xeon® Gold 6226 processor	Y	Y	5YZ4
Intel® Xeon® Gold 6136 processor	Y	Y	1XMD
Intel® Xeon® Gold 6128 processor	Y	Y	1XMD
Intel® Xeon® Gold 5222 processor	Y	Y	5YZ3
Intel® Xeon® Gold 5220R processor	Y	Y	8BDO
Intel® Xeon® Gold 5218R processor	Y	Y	9VA8
Intel® Xeon® Gold 5218 processor	Y	Y	5YZ3
Intel® Xeon® Gold 5118 processor	Y	Y	1XMD
Intel® Xeon® Silver 4216 processor	Y	Y	5YZ3
Intel® Xeon® Silver 4215R processor	Y	Y	9VA8
Intel® Xeon® Silver 4214R processor	Y	Y	8BDO
Intel® Xeon® Silver 4214 processor	Y	Y	5YZ3
Intel® Xeon® Silver 4210R processor	Y	Y	8BDO
Intel® Xeon® Silver 4210 processor	Y	Y	5YZ3
Intel® Xeon® Silver 4208 processor	Y	Y	5YZ3
Intel® Xeon® Silver 4114 processor	Y	Y	1XMD
Intel® Xeon® Silver 4108 processor	Y	Y	1XMD
Intel® Xeon® Bronze 3206R processor	Y	Y	8BDO
Intel® Xeon® Bronze 3204 processor	Y	Y	5YZ3

¹ Options kits available for second processor upgrade.

Disclaimers: When ordering two processors, the second processor must be the same as the first. Intel processor measurement of higher performance. Processor numbers differentiate features within each processor family, not processor families.

Note 1: Intel® DCPMM® (Data Center Persistent Memory) Supported.

Supported Components

Monitors / Displays

	Factory Configured	Option Kit	Part Number
HP Z Display Z22n G2	Y	1JS	
HP Z Display Z23n G2	Y	1JS	
HP Z Display Z24i G2	Y	1JS	
HP Z Display Z24n G2	Y	1JS	
HP Z Display Z24nf G2	Y	1JS	
HP Z Display Z27n G2	Y	1JS	
HP Z Display Z27s (4K display)	Y	1JS	J3G
Supported by all operating systems available from HP Screen size measured diagonally			

Storage / Hard Drives

SAS Hard Drives

	Factory Configured	Option Kit	Part Number
SAS Hard Drives for HP Workstations			
HP 300GB 15k SAS SFF	Y	Y	LD
NOTE: SAS controller add-in card required			

SATA Hard Drives

	Factory Configured	Option Kit	Part Number
SATA (Serial ATA) Hard Drives for HP Workstations			
500GB SATA 7200RPM 6Gb/s 3.5" HDD	Y	Y	LD
500GB SATA 7200RPM 6Gb/s OPAL2 SFF 3.5" HDD	Y	Y	DL
1TB SATA 7200RPM 3.5" HDD	Y	Y	LD
1TB SATA 7200RPM Ent 3.5" HDD	Y	Y	VL
2TB SATA 7200RPM HDD CMR	Y	Y	CO
2TB SATA 7200RPM HDD SMR	Y	Y	CD
2TB 7200RPM SATA 3.5in Enterprise	Y	Y	ZA
4TB SATA 7200RPM Ent 3.5" HDD	Y	Y	HF
6TB SATA 7200RPM Ent 3.5" HDD	Y	Y	3H
8TB 7200RPM SATA 3.5in Enterprise	Y	Y	2H

NOTES:

Up to (4) 3.5-inch 7200 rpm SATA drives: 8TB

Up to (5) 3.5-inch 7200 rpm SATA drives: 500GB, 1.0TB, 2.0TB, 4.0TB, 6.0TB

Supported Components

SATA Solid State Drives

	Factory Configured	Option Kit
HP Solid State Drives (SSDs) for Workstations		
HP 256GB SATA SSD	Y	Y
HP 512GB SATA SSD	Y	Y
HP 1TB SATA SSD	Y	Y
HP 2TB SATA SSD	Y	Y
HP 256GB SATA SED OPAL2 SSD	Y	Y
HP 512GB SATA SED OPAL2 SSD	Y	Y
HP 240GB SATA Enterprise SSD	Y	Y
HP 480GB SATA Enterprise SSD	Y	Y
960GB 2.5in Enterprise SATA-3 SSD	Y	Y
1920GB 2.5in Enterprise SATA-3 SSD	Y	1W6P9AA

PCIe Solid State Drives

	Factory Configured	Option Kit
PCIe SSDs for HP Workstations		
HP Z Turbo Drive 256GB MLC Z8G4 SSD Module	N	N
HP Z Turbo Drive 512GB MLC Z8G4 SSD Module	N	N
HP Z Turbo Drive 1TB MLC Z8G4 SSD Module	N	N
HP Z Turbo Drive 256GB TLC Z8G4 SSD Module	Y	Y
HP Z Turbo Drive 512GB TLC Z8G4 SSD Module	Y	Y
HP Z Turbo Drive 1TB TLC Z8G4 SSD Module	Y	Y
HP Z Turbo Drive 2TB TLC Z8G4 SSD Module	Y	Y
HP Z Turbo Drive 256GB SED Z8G4 SSD Module	N	N
HP Z Turbo Drive 512GB SED Z8G4 SSD Module	N	N
HP Z Turbo Drive 256GB MLC Z8 G4 SSD Kit	N	N
HP Z Turbo Drive 512GB MLC Z8 G4 SSD Kit	N	N
HP Z Turbo Drive 1TB MLC Z8 G4 SSD Kit	N	N
HP Z Turbo Drive 256GB TLC Z8 G4 SSD Kit	Y	Y
HP Z Turbo Drive 512GB TLC Z8 G4 SSD Kit	Y	Y
HP Z Turbo Drive 1TB TLC Z8 G4 SSD Kit	Y	Y
HP Z Turbo Drive 2TB TLC Z8 G4 SSD Kit	Y	Y
HP Z Turbo Drive 256GB SED Z8 G4 SSD Kit	Y	Y
HP Z Turbo Drive 512GB SED Z8 G4 SSD Kit	Y	Y
HP Z Turbo Drive 1TB SED Z8 G4 SSD Kit	Y	Y
HP Z Turbo Drive 1TB SED Z8 G4 SSD Module	Y	Y

Supported Components

HP Z Turbo 2TB SED OPAL2 TLC M.2 Z8 SSD	Y	Y	2Y
HP 1x256GB M.2 2280 PCIe NVMe TLC SSD Z8 G4 Kit	Y	Y	8P
HP 1x512GB M.2 2280 PCIe NVMe TLC SSD Z8 G4 Kit	Y	Y	8P
HP 1x1TB M.2 2280 PCIe NVMe TLC SSD Z8 G4 Kit	Y	Y	8P
HP 256GB M.2 2280 PCIe NVMe TLC SSD Module	N	Y	8P
HP 512GB M.2 2280 PCIe NVMe TLC SSD Module	N	Y	8P
HP 1TB M.2 2280 PCIe NVMe TLC SSD Module	N	N	8P
HP 2TB PCIe NVME TLC M.2 Z8 G4 SSD	Y	Y	30
HP Z Turbo Drive Quad Pro			
HP Z Turbo Drive Quad Pro 2x256GB PCIe TLC SSD	Y	Y	4Y
HP Z Turbo Drive Quad Pro 2x512GB PCIe TLC SSD	Y	Y	4Y
HP Z Turbo Drive Quad Pro 2x1TB PCIe TLC SSD	Y	Y	4Y
HP Z Turbo Drive Quad Pro 2x2TB PCIe TLC SSD	Y	Y	3K
HP Z Turbo Drive Quad Pro 256GB TLC SSD module	N	Y	4Y
HP Z Turbo Drive Quad Pro 512GB TLC SSD module	N	Y	4Y
HP Z Turbo Drive Quad Pro 1TB TLC SSD module	N	Y	4Y
HP Z Turbo Drive Dual Pro			
HP Z Turbo Drive Dual Pro 256GB TLC SSD	Y	Y	4Y
HP Z Turbo Drive Dual Pro 512GB TLC SSD	Y	Y	4Y
HP Z Turbo Drive Dual Pro 1TB TLC SSD	Y	Y	4Y
HP Z Turbo Drive Dual Pro 2TB TLC SSD	Y	Y	4Y
HP 256GB M.2 2280 PCIe NVMe TLC SSD Dual Pro Kit	Y	Y	8P
HP 512GB M.2 2280 PCIe NVMe TLC SSD Dual Pro Kit	Y	Y	8P
HP 1TB M.2 2280 PCIe NVMe TLC SSD Dual Pro Kit	Y	Y	8P
Intel® 905p Series SSD (Optane SSD)			
Intel® Optane SSD 905p 280GB AiC**	Y	Y	2S
Intel® Optane SSD 905p 480GB AiC**	Y	Y	2S
Intel® Optane SSD 905p 380GB M.2 SSD Module	Y	Y	6L

NOTE 1: Dual M.2 SSD drive plus Quad Pro carrier

NOTE 2: M.2 SSD drive only designed to be installed in Quad Pro, Dual Pro or personality module

NOTE 3: Kit includes single M.2 SSD, dual pro carrier and heat sink

NOTE 4: Kit includes single M.2 SSD, dual personality module carrier and heat sink

NOTE 5: These M.2 SSD Kits and modules are End of Life and no longer available.

*For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30GB of system

system recovery software

** PCIe card installed in standard PCIe x4 slot

Supported Components

Hard Drive Controllers

	Factory Configured	Option Kit
SAS Controller MicroSemi SmartHBA2100-4i4e SAS Controller	Y	Y

Graphics

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes	Supported # of cards
Graphics Cable Adapters					
HP miniDP-to-DP Adapter	Y	Y			
HP miniDP-to-DP Adapter (2-pack)	Y	N			
HP miniDP-to-DP Adapter (4-pack)	Y	N			
HP miniDP-to-DP Adapter (8-pack)	Y	N			
HP DisplayPort to Dual Link DVI Adapter	Y	Y	NR078AA		
HP DisplayPort to DVI-D Adapter	Y	Y	FH973AA		
HP DisplayPort to DVI-D Adapter (2-pack)	Y	N			
HP DisplayPort to DVI-D Adapter (4-pack)	Y	N			
HP DisplayPort to DVI-D Adapter (6-pack)	Y	N			
HP DisplayPort to VGA Adapter	Y	Y	AS615AA		
HP DisplayPort to HDMI Adapter	Y	Y	K2K92AA		
NVIDIA SLI 2-slot Graphics Connector	Y	Y	2YY84AA		
Quadro RTX NVLink High-Bandwidth 2-slotBridge (RTX 8000, RTX 6000)	N	Y	6FY11AA		
Quadro RTX NVLink 2-slotBridge (RTX 5000)	Y	Y	6FY12AA		
NVIDIA NVLink 2-Slot Bridge (RTX A6000, RTX A5000, RTX A4500)	N	Y	340L2AA		
Entry 3D					
NVIDIA® Quadro® P620 2GB Graphics	Y	Y	3ME25AA		2
NVIDIA® T400 4 GB 3mDP Graphics	Y	Y	5Z7E0AA/AT		2
Mid-range 3D					
NVIDIA® T1000 4 GB 4mDP Graphics	Y	Y	20X22AA/AT		3
NVIDIA® T1000 8 GB 4mDP Graphics	Y	Y	5Z7D8AA/AT		3
NVIDIA Long-Life T1000E 8 GB 4mDP Graphics	Y	Y	6V9V4AA/AT		3
NVIDIA® Quadro® P1000 4GB Graphics	Y	Y	1ME01AA		4
NVIDIA® RTX A2000 6 GB 4mDP Graphics	Y	Y	340L0AA		3
NVIDIA® RTX A2000 12 GB 4mDP Graphics	Y	Y	5Z7D9AA/AT		3
AMD Radeon™ Pro WX 3200 4GB Graphics	Y	Y	6YT68AA		4
AMD Radeon Pro W6600 8 GB GDDR6 4DP Graphics	Y	Y	340K5AA		2
High End 3D					

Supported Components

NVIDIA® RTX A4000 16 GB 4mDP Graphics	Y	Y		
NVIDIA Long-Life RTX A4000E 16 GB 4DP Graphics	N	Y	6H7J7AA	
NVIDIA® RTX A4500 20 GB GDDR6 4DP Graphics	Y	Y	5S458AA/AT	3
AMD Radeon™ Pro W5500 8GB 4DP GFX	Y	Y	9GC16AA/AT	3
AMD Radeon™ Pro W5700 8GB 5mDP+USBc GFX	Y	Y	9GC15AA/AT	2
Ultra High-End 3D				
NVIDIA® Quadro® GV100 32GB Graphics	Y	Y	3ME26AA	3
NVIDIA® RTX A5000 24 GB Graphics	Y	Y	20X23AA	3
NVIDIA® RTX A6000 48GB Graphics	Y	Y	2S6U3AA	2
AMD Radeon Pro W6800 32GB Graphics	Y	Y	340K7AA	1
NVIDIA® Quadro® Sync II	Y	Y	1WT20AA	

Memory	SL Processor	CL Processor	Factory Configured	Option Kit	Part Number
DDR4-2666 ECC RegisteredDIMMs					
8GB (1x8GB) DDR4-2666 ECC Reg Memory	Y	N	Y	Y	
16GB (1x16GB) DDR4-2666 ECC Reg Memory	Y	N	N	Y	
32GB (1x32GB) DDR4-2666 ECC Reg Memory	Y	N	N	Y	
64GB (1x64GB) DDR4-2666 ECC LR Memory	Y	N	N	Y	
128GB (1x128GB) DDR4-2666 ECC 3DS LR Memory	Y	N	N	Y	
8GB (1x8GB) DDR4-2933 ECC Reg Memory	Y	Y	Y	Y	
16GB (1x16GB) DDR4-2933 ECC Reg Memory	N	Y	N	Y	
32GB (1x32GB) DDR4-2933 ECC Reg Memory	N	Y	N	Y	
64GB (1x64GB) DDR4-2933 ECC Reg Memory	N	Y	N	Y	

SL CPU: Are processors formerly known as Intel® Skylake that are sold under the model name Intel® Xeon® SP: Platinum 8100, Gold 6100 and Bronze 3100 Family

CL CPU: Are processors formerly known Intel® Cascade Lake that are sold under the model name Intel® Xeon® SP: Platinum 8200, Gold 4200 and Bronze 3200 Family

NOTES:

1. For details on the supported memory configurations on the HP Z8 G4 Workstation, please refer to the System Technical Specification of this document.

2. Sleep (S3 state) support:

- Sleep (S3 state) may not be supported with non-HP validated and qualified 64 GB LR DIMMs.
- Sleep (S3 state) is not supported with 128 GB 3DS LR DIMMs

3. You cannot intermix different types of memory. The system will not work if LR DIMMs, RDIMMs or 3DS LR DIMMs are intermixed. DIMMs should be equally distributed across all six memory channels for optimal performance.

Each processor supports up to 6 channels of DDR4 memory. To realize full performance at least 1 DIMM must be inserted into each channel. The CPUs determine the speed at which the memory is clocked. If a 2400MT/s capable CPU is used in the system, the maximum speed is 2400MT/s, regardless of the specified speed of the memory.

Supported Components

MT/s = Million Transfers per second

The Z8 G4 is designed to work ONLY with DDR4 memory. The system will not work with DDR3 memory.

NOTE: Factory-configured CTO (xxxxxAV) and aftermarket AMO (xxxxxAA, xxxxAT) HP memory part numbers designated as "2666" or "3200" speed memory components. Similarly, HP Memory part numbers designated as "2933" may ship with "3200" speed memory. This number availability, nor does it affect system performance or operation. All hardware configurations currently supporting HP memory as "2666" or 2933 have been fully qualified to work with fast speed memory and are fully supported by HP under standard support terms.

NVDRAM Memory

	Factory Configured	Option Kit	Option N
Intel® Optane™ DC Persistent Memory (DCPMM)			
128GB (1x128GB) DC Persistent Memory Module	Y	Y	9N
256GB (2x128GB) DC Persistent Memory Configuration	Y	N	
256GB (1x256GB) DC Persistent Memory Module	N	Y	4B
512GB (4x128GB) DC Persistent Memory Configuration	Y	N	

NOTE 1: Supported only with Xeon 82xx, 62xx, 52xx and 4215/4215R processors.

- a. Available as factory configured in Memory Mode or Storage Mode.
- i. Option Kit 4D8COAA is currently only supported in memory mode.
 - b. Systems configured with DCPMM memory will operate the memory subsystem at 2666 MT/s.
 - c. Operating System Support:
 - i. Windows 11 Pro for Workstations with all updates applied
 - ii. Windows 10 Pro for Workstations v1903 or later with all updates applied.
 - iii. Linux OS support may be found in the [Linux Hardware Support Matrix](#).
 - d. Detailed setup, security and support information may be found in the [Intel® Optane™ DC Persistent Memory: Configuration and HP Z6 G4 and Z8 G4 Workstation white paper](#).
 - e. DCPMM solutions require additional DRAM memory to be included in the solution:
 - i. Systems configured with DCPMM in Memory Mode will include DRAM memory to be used as cache. The amount of memory based on an 8:1 DCPMM to DRAM capacity ratio.
 - ii. Systems configured with DCPMM in Storage Mode will require DRAM System Memory to be ordered separately.
 - iii. DCPMM Memory will report approximately 2% less than advertised capacity .
 - f. Total Memory (DCPMM + DRAM) per processor must be <= 1TB or 2TB per dual processor system.
 - i. Z8 G4 **NOTE:** "M" processors support a total memory limit <=2TB per processors or 4TB per dual processor system
 - ii. When Configured in Memory Mode, additional DRAM does not count against maximum processor memory.
 - g. Maximum number of DCPMM modules in a Z8G4 is 6 per processor.
 - h. Customer is responsible for additional required DRAM when adding DCPMM modules in Memory Mode.
 - i. HP Z8G4 configured with some AMD Graphics are limited to 1TB of total DCPMM and DRAM memory. See AMD Graphics details.

NOTE 2: Requires 2nd processor option.

Multimedia and Audio Devices

	Factory Configure d	Option Kit	Option Kit Part Number	Support Notes
Integrated Realtek HD ALC221 Audio	Y	N		

Supported Components

Optical and Removable Storage

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP SlimTray Optical Drives				
HP 9.5mm Slim Blu Ray Disc Writer	Y	Y	K3R65AA	1
HP 9.5mm Slim DVD ROM	Y	Y	K3R63AA	1
HP Half Height Optical Drives				
HP HH DVD Writer (16X RW DVD-R)	N	Y	4AR67AA	
HP 9.5mm Slim DVD Writer*	Y	Y	K3R64AA	1
HP SD Card Reader				
HP SD 4 Card Reader	Y	Y	Y0L99AA	
HDD Frame/Carriers				
HP DX175 Removable HDD Carrier	N	Y	1ZX72AA	
HP DX175 Removable HDD Frame/Carrier	N	Y	1ZX71AA	
NVMe Frame/Carrier				
HP QX310 Removable NVMe Frame/Carrier w/PCIe card	Y	N		
HP QX310 Removable Carrier only	N	Y	8GQ91AA/AT	

NOTE 1: Installing an optical drive into Z8 G4 requires a 5.25" external bay adapter 746536-001 which is included in the ODD kit.

*Actual speeds may vary. No support for DVD-RAM (DVD Writer). Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

With Blu-ray, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

Networking and Communications

Supported Components

	Factory Configured	Option Kit	Option Kit Number
NVIDIA® Mellanox® ConnectX-6 DX Dual Port 10/25GbE SFP28 NIC	Y	Y	436M8
HP 10GbE SFP+ SR/SW LC Fiber Optic Transceiver	N	Y	860T8
HP 25GbE SFP28 LC Fiber Optic Transceiver	N	Y	860T9
Intel® I350-T2 PCIe Dual Port Gigabit NIC	Y	Y	V4A91
Intel® I350-T4 PCIe 4-Port Gigabit NIC	N	Y	W8X23
Intel® Ethernet I210-T1 PCIe x1 Gb NIC	Y	Y	E0X95
Aquantia® NBASE-T 5GbE PCIe NIC	N	Y	1PM63
Intel® X550-T2 10GbE Dual Port NIC	Y	Y	1QL46
Intel® X710-DA2 10GbE SFP+ Dual Port NIC	Y	Y	1QL47
HP 10GBASE-T Dual NIC Module Z6/8 G4	Y	Y	1QL49
Intel® 8265 802.11 a/b/g/n/ac&BT PCIe	N	Y	1QL48
Intel® 9260 802.11 a/b/g/n/ac&BT PCIe	N	Y	6SL33
HP 10GbE SFP+ SR 1 st Transceiver	Y	Y	C3N53
HP 10GbE SFP+ SR 2 nd Transceiver	Y	Y	C3N53
Intel® Wi-Fi 6 AX200 & BT PCIe	N	Y	7CE01
Intel AX210 Wi-Fi 6e non-vPro +Bluetooth 5.2 External Antenna WLAN	N	Y	340L7
Allied Telesis AT-2914SX/LC-901 1GB LC Fiber NIC	Y	Y	1C7Q2A
Allied Telesis AT-2911T/2-901 Dual Port 1GbE NIC	Y	Y	6E3Y9A

Note 1: Transceivers sold separately. You must have a transceiver installed in order to connect this card to a network.

Note 2: Windows 7 is NOT supported

Racking and Physical Security

	Factory Configured	Option Kit	Part Number	Support Notes
Security Cable with Kensington Lock	N	Y	PC766A	
HP Chassis Intrusion Sensor	Y	N		1
HP Z640/Z840/Z8G4 Rail Rack Kit	N	Y	2FZ77AA	
HP Z8 Rack Rail Upgrade Kit	N	Y	2FZ76AA	
HP Keyed Cable Lock 10mm	N	Y	T1A62AA	

NOTE 1: Standard on all systems

Input Devices

Supported Components

	Factory Configured	Option Kit	Part Number
HP Wireless Business Slim Keyboard and Mouse	Y	Y	N
Business Slim PS/2 Wired Keyboard	Y	Y	N
USB Business Slim Wired Keyboard	Y	Y	N
USB Premium Wired Keyboard	Y	Y	Z
USB Wired SmartCard CCID Keyboard	Y	Y	EU
HP 320K Wired Keyboard	Y	Y	9
HP Optical USB Mouse	Y	Y	Q
HP PS/2 Mouse	Y	Y	Q
USB 1000dpi Laser Mouse	Y	Y	Q
HP USB Hardened Mouse	Y	Y	P
HP Creator 935 Black Wireless Mouse	N	Y	1
HP Wired 320M Mouse	Y	Y	9

Other Hardware

	Factory Configured	Option Kit	Option Kit Part Number
HP Internal USB Port Kit	N	Y	EM165AA
HP eSATA PCI Cable Kit	Y	Y	GM110AA
HP Optical Bay HDD Mounting Bracket	N	Y	NQ099AA
HP 2.5in HDD/SSD 2-in-1 ODD Bay Bracket	N	Y	K4T74AA
HP Z Premium Front I/O 2xUSB-A 2xUSB-C	N	Y	1XM32AA
HP Power Cord Kit	Y	N	
HP Workstation Mouse Pad	Y	N	
HP ENERGY STAR® Certified Configuration	Y	N	
HP Remote System Controller	N	Y	7K6D7AA
HP Remote System Controller Main Board Adapter	N	Y	7K6D8AA
HP Integrated Remote System Controller	N	Y	7K6D9AA
HP Z4/Z6/Z8 G4 / ZCentral 4R Remote System Controller Cable Adapter	N	Y	7K6E5AA
HP Remote System Controller for Universal KVM	N	Y	7K7N2AA

NOTE 1: The HP Internal USB Port kit has a single USB 2.0 type A connector.

NOTE 2: No hot plug / hot swap supported with eSATA

NOTE 3: NQ099AA used to install greater than four 3.5" HDDs in the factory or when purchasing Aftermarket Options

NOTE 4: K4T74AA used to install greater than four 2.5" HDD/SSDs in the factory or when purchasing Aftermarket Options

NOTE 5: Requires additional purchase of 7K6E5AA HP Z4/Z6/Z8 G4 / ZCentral 4R Remote System Controller Cable Adapter

NOTE 6: By installing the HP Z4/Z6/Z8 G4 / ZCentral 4R Remote System Controller Cable Adapter (7K6E5AA), power the front USB ports on the host. This was necessary to be able to power the Remote System Controllers in all power supplies. The front USB ports unpowered and unusable.

Supported Components

Application Software

	Factory Configured	Option Kit	Option Kit		Support Notes
			Part Number	Support Notes	
Sobey Video Editing SW	Y	N		China Only	
HP ZCentral Remote Boost	N	N			
Data Science Stack	Y	N		1, 2	
WSL2/Ubuntu Data Science Stack	Y	N		1, 3	
Wolf Pro Security				4	

*Not all Application Software for Z Desktop Workstations is included with purchase.

Note 1: Only available with NVIDIA graphics cards selections.

Note 2: Only available with Ubuntu 20.04 LTS preinstall.

Note 3: Only available with Windows 10 Pro for Workstations or Windows 11 Pro for Workstations.

Note 4: HP Wolf Pro Security Edition is available preloaded on select SKUs, and, depending on the HP product purchased, includes a license with a term length communicated to you at purchase and in your order confirmation email. The HP Wolf Pro Security Edition software is licensed under the license terms of the HP Wolf Security Software - End-User license Agreement (EULA) that can be found at:

https://support.hp.com/us-en/document/ish_3875769-3873014-16 as that EULA is modified by the following: 7. Term. Unless otherwise terminated earlier pursuant to the terms contained in this EULA, the license for the HP Wolf Pro Security Edition is effective upon 4 months after the date the HP Product was shipped by HP and will continue for the term communicated to you at purchase and in your order confirmation email ("Initial Term"). At the end of the Initial Term you may either (a) purchase a renewal license for the HP Wolf Pro Security Edition from HP.com, HP Sales or an HP Channel Partner, or (b) continue using the standard versions of HP Sure Click and HP Sure Sense at no additional cost with no future software updates or HP Support. Notwithstanding the foregoing, the license shall expire no later than one year after the fixed term of the subject license ends.

Operating Systems

	Support Notes
Windows 11 Pro for Workstations	Note 4,5
Windows 10 Pro for Workstations	Note 3,4,5
Ubuntu 20.04 LTS	Note 2
HP Linux® Installer Kit	Note 2
Red Hat® Enterprise Linux® (RHEL) Workstation - Paper License (1yr)	Note 1,2

NOTE 1: This second OS must be ordered with the HP Linux® Installer Kit as the first OS.

NOTE 2: For detailed Linux® OS/hardware support information, see:

http://www.hp.com/support/linux_hardware_matrix

NOTE 3: Device comes with Windows 10 and a free Windows 11 upgrade or may be preloaded with Windows 11. Upgrade timing may vary by device. Features and app availability may vary by region. Certain features require specific hardware (see Windows 11 Specifications).

NOTE 4: Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

NOTE 5: Available with Windows Subsystem for Linux® (WSL2).

System Technical Specifications

System Board

System Board Form Factor	Custom Form Factor, 16.34" x 15.25" (415mm x 387.2mm)
Processor Socket	Dual FCLGA3647 (Socket P)
CPU Bus Speed	UPI: Up to 10.4GT/second, depending on processor
Chipset	Intel® C622 Chipset
Super I/O Controller	Nuvoton SI015
Memory Expansion Slots	24 slots (12 slots per CPU)
Memory Type Supported	DDR4 R-DIMM (Registered), ECC: 8GB, 16GB, 32GB, and 64GB DDR4 LR-DIMM (Load Reduced), ECC: 64GB DDR4 3DS LR DIMM (3D Stacked, Load Reduced), ECC: 128GB* *128GB DIMMs are supported but no longer supplied by HP
Memory Modes	NUMA (Non-Uniform Memory Architecture), Memory Node Interleave
Memory Speed Supported	2133MT/s, 2400MT/s, and 2666MT/s, and 2933MT/s

Available Memory Configurations:

Single Processor												
CPU 0												
System Memory	Top Slots						Bottom Slots					
	DIMM 1	DIMM 2	DIMM 3	DIMM 4	DIMM 5	DIMM 6	DIMM 7	DIMM 8	DIMM 9	DIMM 10	DIMM 11	DIMM 12
8GB	8GB											
16GB	8GB											8GB
24GB	8GB		8GB		8GB							
32GB	8GB		8GB							8GB		8GB
	16GB											16GB
48GB	8GB		8GB		8GB			8GB		8GB		8GB
	16GB		16GB		16GB							
64GB	16GB		16GB							16GB		16GB
	32GB											32GB
96GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB
	16GB		16GB		16GB			16GB		16GB		16GB
	32GB			32GB		32GB						
128GB	32GB		32GB							32GB		32GB
192GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB
	32GB		32GB		32GB			32GB		32GB		32GB
256GB	32GB	32GB	32GB		32GB			32GB		32GB	32GB	32GB
	64GB		64GB							64GB		64GB
384GB	32GB	32GB	32GB	32GB	32GB	32GB	32GB	32GB	32GB	32GB	32GB	32GB
	64GB		64GB		64GB			64GB		64GB		64GB
512GB	64GB	64GB	64GB		64GB			64GB		64GB	64GB	64GB
768 GB	64GB	64GB	64GB	64GB	64GB	64GB	64GB	64GB	64GB	64GB	64GB	64GB
	128GB		128GB		128GB			128GB		128GB	128GB	128GB
1.5 TB	128GB	128GB	128GB	128GB	128GB	128GB	128GB	128GB	128GB	128GB	128GB	128GB

Dual Processor Configuration												
CPU 0							CPU 1					

System Technical Specifications


System	Top Slots						Bottom Slots						Top Slots						
	DIMM 1	DIMM 2	DIMM 3	DIMM 4	DIMM 5	DIMM 6	DIMM 7	DIMM 8	DIMM 9	DIMM 10	DIMM 11	DIMM 12	DIMM 1	DIMM 2	DIMM 3	DIMM 4	DIMM 5	DIMM 6	DIMM 7
Memory																			
16 GB	8GB												8GB						
32 GB	8GB												8GB	8GB					
48 GB	8GB		8GB		8GB									8GB		8GB		8GB	
64 GB	8GB		8GB								8GB		8GB	8GB		8GB			
	16GB												16GB	16GB					
96 GB	8GB		8GB		8GB			8GB					8GB	8GB		8GB		8GB	
	16GB		16GB		16GB									16GB		16GB		16GB	
128 GB	16GB		16GB							16GB			16GB	16GB		16GB			
	32GB												32GB	32GB					
192 GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB
	16GB		16GB		16GB			16GB		16GB			16GB	16GB		16GB		16GB	
	32GB		32GB		32GB								32GB		32GB		32GB		
256 GB	32GB		32GB							32GB			32GB	32GB		32GB			
	64GB												64GB	64GB					
384 GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB
	32GB		32GB		32GB			32GB		32GB			32GB	32GB		32GB		32GB	
	64GB		64GB		64GB								64GB		64GB		64GB		
512 GB	64GB		64GB							64GB			64GB	64GB		64GB			

System Technical Specifications

	32GB	32GB																							
76 8G B	64GB		64GB		64GB			64GB																	
	128GB		128GB		128GB											128GB		128GB		128GB					
1T B	64GB	64GB	64GB		64GB			64GB																	
	128GB		128GB		128GB			128GB																	
3T B	128GB																								

Memory Loading Order:

Load Order for Single and Dual Processor Configuration

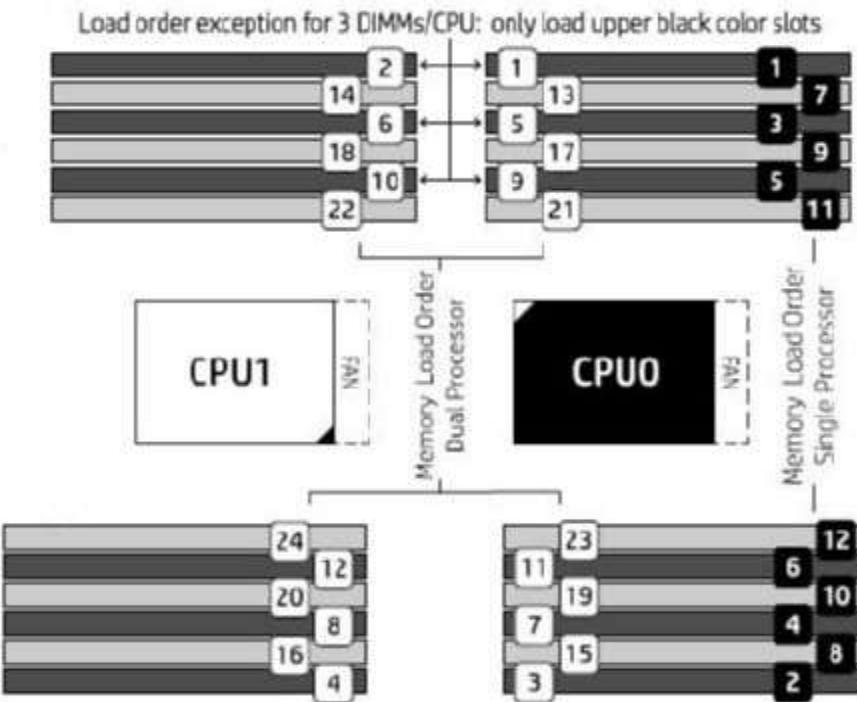

Maximum Memory

Supports up to 1.5TB with two processors, using RDIMMs

Supports up to 3TB with two processors, using 3DS LR DIMMs*

*The 3TB configuration requires 128GB DIMMs which are no longer sold by HP

System Technical Specifications

Memory Configuration (Supported)

Only ECC Registered DIMMs are supported.

- RDIMM (Registered) ,LR DIMM (Load Reduction) and 3DS LR DIMM (3D Stacked LR) can be mixed. All memory installed in the system must be either RDIMM , LR DIMM or 3DS LR DIMM.
- Do not install memory modules into memory slots if corresponding processor is not installed.
- Dual processor configurations with memory modules installed for only one processor are not supported.

Notes

For systems installed with Microsoft Windows 7 (Ultimate, Enterprise or Pro), the maximum accessible system memory is 128 GB.

- Sleep (S3 state) support:
- Sleep (S3 state) may not be supported with non-HP validated and qualified 64 GB LR DIMMs.
- Sleep (S3 state) not supported with 128 GB LR DIMMs

NVDRAM Memory

Intel® Optane™ DC Persistent Memory is available factory configured in the following capacities:

- 128GB (1x128GB) Single Processor Configuration
- 256GB (2x128GB) Single Processor Configuration
- 512GB (4x128GB) Dual Processor Configuration

NOTES:

1. Supported only with Xeon 82xx, 62xx, 52xx and 4215 processors.
 - a. Available as factory configured in Memory Mode or Storage Mode.
 - i. Microsoft Configured Memory Mode will be available in CQ1 2020
 - b. Systems configured with DCPMM memory will operate the memory subsystem at 2666 MT/s.
 - c. Operating System Support:
 - i. Windows 11 Pro for Workstations with all updates applied.
 - ii. Windows 10 Pro for Workstations v1903 or later with all updates applied.
 - iii. Linux OS support may be found in the [Linux Hardware Support Matrix](#).
 - d. Detailed setup, security and support information may be found in the [Intel® Optane™ DC Persistent Memory G4 and Z8 G4 Workstation](#) white paper.
 - e. DCPMM solutions require additional DRAM memory to be included in the solution:
 - i. Systems configured with DCPMM in Memory Mode will include DRAM memory to be used as cache. The amount of DRAM required will be dependent on the number of processors and the amount of memory installed on an 8:1 DCPMM to DRAM capacity ratio.
 - ii. Systems configured with DCPMM in Storage Mode will require DRAM System Memory to be ordered separately.
 - iii. DCPMM Memory will report approximately 2% less than advertised capacity .
 - f. Total Memory (DCPMM + DRAM) per processor must be <= 1TB or 2TB per dual processor system.
- i. Z8 G4 **NOTE:** "M" processors support a total memory limit < =2TB per processors or 4TB per dual processor.

2. Option Kit available in CQ1-2020.
3. Requires 2nd processor option.

PCI Express Connectors

Two PCIe Gen3 x16 with latch
Two PCIe Gen3 x16 with latch.

System Technical Specifications

- Enabled only with optional 2nd CPU is installed.

One PCIe Gen3 x8 open-ended connector.

- Enabled for One PCIe Gen2 x4 slot with 1 CPU
- Enabled for One PCIe Gen3 x8 with optional 2nd CPU installed

Two PCIe Gen3 x4 open-ended connectors

Supported Drive Interfaces

SATA

2 sSATA @6Gb/s, supports RAID 0, 1.

8 SATA @6Gb/s, supports RAID 0, 1, 5, 10.

Factory integrated Intel® SATA RAID is Microsoft Windows only.

External SATA (eSATA)*

Supported on all SATA and sSATA ports configurable with optional eSATA* A

* hot plug / hot swap not supported with eSATA

Factory Configured RAID

SATA: RAID 0, 1, 10

Network Controller

Integrated Intel I219LM

Memory Integrated 3KB receive buffer and 3KB transmit buffer

Data rates supported: 10/100/1000 Mb/s

Compliance IEEE 802.1as/1588, 802.1p, 802.1Q, 802.3, 802.3ab, 802.3az, 802.3ac

Up to 32 programmable filters

Bus architecture PCIe 1.0 x1 and SMBus

UEFI and PXE Boot ROM support

Network transfer rates:

10BASE-T (half-duplex) 10 Mb/s

10BASE-T (full-duplex) 20 Mb/s

100BASE-TX (half-duplex) 100 Mb/s

100BASE-TX (full-duplex) 200 Mb/s

1000BASE-T (full-duplex) 2000 Mb/s

Management capabilities: WOL (All Power States, including Max Power Savings)

Advanced cable diagnostics, AMT 11.2x support, vPro compliant

Integrated Intel X722 for 1GbE

Data rates supported: 1000 Mb/s

Compliance IEEE 802.1as/1588v2, 802.1p, 802.1Q, 802.3, 802.3ab, 802.3az, 802.3ac

Up to 16 UDP/TCP programmable filters

Bus architecture: PCIe 3.0

UEFI and PXE Boot ROM support

Intel iWARP Support (RDMA)

Network transfer rates:

1000BASE-T (full-duplex) 2000 Mb/s

Management capabilities: WOL (Excluding Max Power Savings), auto MDI crossover

Advanced cable diagnostics

Integrated Graphics

None

PCI-X Connectors

None

PCI Card Guide

Yes

Wake on LAN

Yes, both ports

Integrated Trusted Platform Module

Trusted Platform Module (TPM) 2.0 (Infineon SLB 9670)

Common Criteria EAL4+ Certified

FIPS 140-2 Certified (firmware v7.85)

TPM Certified products list:

<https://trustedcomputinggroup.org/membership/certification/tpm-certified-products/>

CG TPM Certified products list:

<http://www.trustedcomputinggroup.org/certification/tpm-certified-products/>

IEEE 1394 Connector(s)

Front

None

Rear

None

Internal

None

USB Connector(s)

Front

Front I/O Entry: 4 USB 3.1 Gen1 (Left-most Port has Charging Capability)

Front I/O Premium: 2x USB 3.1 Gen1, 2x USB 3.1 Gen2 Type-C™ (Left-most Port has Charging Capability)

System Technical Specifications

- Charging Ports provide 1.5 Amps @ 5 Volts
- Standard USB Type A Ports provide 900mA @ 5 Volts
- USB Type C Ports provide 3 Amps @ 5 Volts

Rear	6 USB 3.1 Gen1, Type A
Internal	1 USB 3.1 Gen1 available with a single 12-pin shrouded connector. This header 1 USB 2.0 single-port header 1x USB 2.0 dual-port header

HD Integrated Audio	Realtek ALC221
Flash ROM	Yes
CPU Fan Header	Two headers for CPU fans
Memory Fan Header	Two headers
Chassis Fan Header	One Rear Chassis Fan Header
Front PCI Fan Header	One Front and one Aux Fan Header
Front User Interface Header	Power Button; Power and HDD Activity LEDs; Power for USB Ports
Front Audio Header	FIO Headset/Mic and Speaker
CMOS Battery Holder - Lithium	Yes
Power Supply Headers	Yes
Clear Password Jumper	Yes
Serial Port	Yes, on rear panel
Parallel Port	No
Keyboard/Mouse	Yes

Power Supply	1125W/1275W*/1450W*	90% Efficient, Custom PSU	(Wide-Ranging, Active PFC)	1450W/1550W*
Operating Voltage Range	90-269 VAC			90% Efficient
Rated Voltage Range	100-127 VAC 200-240 VAC	118 VAC	100-127VAC 200-240VAC	(Wide-Ranging)
Rated Line Frequency	50-60 Hz	400 Hz	50-60Hz	90-240Hz
Operating Line Frequency Range	47-66 Hz	393-407 Hz	47-66Hz	
Rated Input Current	12A @ 100-127 VAC 10A @ 200-240 VAC	12A @ 118 VAC	16A @ 100-127 VAC 10A @ 200-240 VAC	
Heat Dissipation (Configuration and software dependent)	Typical = 2419 btu/hr Max 1 = 4626 btu/hr Max 2 = 5001 btu/hr Max 3 = 5560 btu/hr			Typical = 2419 btu/hr Max 1 = 4626 btu/hr Max 2 = 5001 btu/hr Max 3 = 5560 btu/hr

Power Supply Fan	(2) Blowers variable speed	(2) Blowers variable speed
ENERGY STAR Qualified (Configuration dependent)	Yes	Yes
Power Supply Efficiency	90% Efficient	90% Efficient

System Technical Specifications

The Z8 G4 1125W (1450W at 200V Input Voltage) power supply efficiency report can be found at this link:
https://plugloadsolutions.com/psu_reports/HP%20Inc_DPS-1125BB%20A_1125W_ECOS%204825_Report.pdf

The Z8 G4 1450W (1700W at 200V Input Voltage) power supply efficiency report can be found at this link:
https://plugloadsolutions.com/psu_reports/HP%20Inc_DPS-1450AB%20A_1450W_ECOS%204825_Report.pdf

FEMP Standby Power	Yes	
Compliant @115V (<2W in S5 - Power Off)		
EuP Compliant @ 230V (<0.5 W in S5 - Power Off)	Yes	
CECP Compliant @ 220V (<4W in S3 - Suspend to RAM)	Yes; Configuration dependent	Yes; Configuration
Power Consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3) (Instantly Available PC)	TBD	T
Built-in Self-Test LED	Yes	Y
Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)	Yes	Y

*Input voltage restriction

NOTE: The 1125W (1450W at 200V Input Voltage) power supply can also supply 1275W of output power when the input voltage is less than 105V, but greater than 90V for any reason, the maximum power that can be drawn is 1125W (UPS) is highly recommended if 1275W output power is desired.

The 1125W Power Supply can also supply 1450W of output power when the input voltage is greater than 180V under all conditions.

NOTE: The 1450W (1700W at 200V Input Voltage) power supply can also supply 1550W of output power when the input voltage is less than 105V, but greater than 90V for any reason, the maximum power that can be drawn is 1450W (UPS) is highly recommended if 1550W output power is desired.

The 1450W Power Supply can also supply 1700W of output power when the input voltage is greater than 180V under all conditions.

AUX IN (audio)	No
Clear CMOS Button	Yes
Multibay Header	No
Integrated Gigabit Ethernet	Yes, dual port.
Access Panel Solenoid Lock Header	No
Access Panel Intrusion Sensor Header	Yes, as part of Front UI (Control Panel) cable header
Memory Fan Connector	Yes, blind-mate

System Configurations

System Technical Specifications

Example Z8 G4 Configuration #1		Processor Info	1x Intel Xeon 3106 1.7 2133 8C 85 1stCPU					
		Memory Info	16GB DDR4-2666 (2x8GB) RegRAM CPU1					
		Graphics Info	1x NVIDIA Quadro P600					
		Disks/Optical/Floppy	1x 256GB SATA 1st SSD /1x DVD-ROM SATA					
		Power Supply	1125W 90% Custom PSU					
		Other	-					
Energy Consumption		115 VAC		230 VAC		100 VAC		
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	
		Windows Idle (S0)	75.4	74.8	75.7			
		Windows Busy Typ(S0)	122.04	111.9	113.6			
		Windows Busy Max (S0)	125.4	124.6	126.6			
		Sleep (S3)	6.22	6.26	6.26	6.33	6.25	
		Off (S5)	4.23	4.19	4.16	4.13	4.12	
		Zero Power Mode (ErP)	0.31	0.40	0.29			
Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC		
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled	
		Windows Idle (S0)	257.5	255.3	258.5			
		Windows Busy Typ(S0)	416.4	382.0	387.6			
		Windows Busy Max (S0)	427.9	425.1	432.0			
		Sleep (S3)	21.2	21.1	21.2	21.6	21.3	
		Off (S5)	14.4	14.0	14.2	14.1	14.1	
		Zero Power Mode (ErP)	1.04	1.38	0.99			
Example Z8 G4 Configuration #2		Processor Info	2x Intel Xeon 4114 2.2 2400 10C 85 1stCPU					
		Memory Info	48GB DDR4-2666 (6x8GB) RegRAM CPU2					
		Graphics Info	1x NVIDIA Quadro P2000					
		Disks/Optical/Floppy	4x 512GB SATA 1st SSD /1x DVD-ROM SATA					
		Power Supply	1125W 90% Custom PSU					
		Other	-					
Energy Consumption		115 VAC		230 VAC		100 VAC		
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	
		Windows Idle (S0)	105.2	103.3	102.5			
		Windows Busy Typ(S0)	257.4	246.3	260.9			
		Windows Busy Max (S0)	296.2	289.9	297.6			
		Sleep (S3)	8.46	8.35	8.45	8.58	8.57	
		Off (S5)	4.15	4.14	4.19	4.21	4.15	
		Zero Power Mode (ErP)	0.31	0.40	0.29			
Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC		
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled	
		Windows Idle (S0)	359.0	352.5	349.8			
		Windows Busy Typ(S0)	878.3	840.5	890.2			
		Windows Busy Max (S0)	1010.7	989.1	1015.6			
		Sleep (S3)	28.8	28.5	29.2	29.2	29.2	
		Off (S5)	14.1	14.1	14.6	14.2	14.1	
		Zero Power Mode (ErP)	1.04	1.36	0.99			

System Technical Specifications

Example Z8 G4 Configuration #3	Processor Info	2x Intel Xeon 5120 2.2 2400 14C 105 1stCPU					
	Memory Info	96GB DDR4-2666 (12x8GB) RegRAM CPU2					
	Graphics Info	1x NVIDIA Quadro P4000					
	Disks/Optical/Floppy	4x 2TB 7200 RPM SATA 1st HDD /1x DVDRW SATA					
	Power Supply	1125W 90% Custom PSU					
	Other	-					
Energy Consumption		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled
	Windows Idle (S0)	125.7		123.6		125.8	
	Windows Busy Typ(S0)	340.7		332.9		343.7	
	Windows Busy Max (S0)	417.1		411.8		426.1	
	Sleep (S3)	9.28	9.10	9.24	9.15	9.49	9.26
	Off (S5)	4.15	4.14	4.32	4.10	4.21	4.16
	Zero Power Mode (ErP)	0.31		0.41		0.30	
Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
	Windows Idle (S0)	429.3		422.0		429.5	
	Windows Busy Typ(S0)	1162.7		1136.0		1172.9	
	Windows Busy Max (S0)	1423.4		1405.3		1453.9	
	Sleep (S3)	31.6	31.0	31.5	31.2	32.4	31.5
	Off (S5)	14.1	14.1	14.7	13.9	14.3	14.2
	Zero Power Mode (ErP)	1.05		1.38		1.03	

Example Z8 G4 Configuration #4	Processor Info	2x Intel Xeon 6152 2.1 2666 22C 140 CPU					
	Memory Info	192GB DDR4-2666 (24x8GB) RegRAM CPU					
	Graphics Info	2x NVIDIA Quadro P5000					
	Disks/Optical/Floppy	6x 1 TB SATA SSD /1x DVDRW SATA					
	Power Supply	1125W 90% Custom PSU					
	Other	-					
Energy Consumption		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled
	Windows Idle (S0)	161.1		157.8		160.4	
	Windows Busy Typ(S0)	524.7		500.7		496.1	
	Windows Busy Max (S0)	644.2		624.2		652.7	
	Sleep (S3)	10.3	10.2	10.2	10.1	10.1	10.1
	Off (S5)	4.14	4.01	4.19	4.19	4.16	4.15
	Zero Power Mode (ErP)	0.31		0.41		0.31	
Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
	Windows Idle (S0)	549.6		538.4		547.5	
	Windows Busy Typ(S0)	1790.4		1708.6		1692.6	
	Windows Busy Max (S0)	2198.1		2129.8		2227.0	
	Sleep (S3)	35.3	34.9	35.0	34.7	34.5	134.3
	Off (S5)	14.1	13.6	14.3	14.3	14.2	14.1
	Zero Power Mode (ErP)	1.06		1.39		1.04	

System Technical Specifications

Example Z8 G4 Configuration #5	Processor Info	2x Intel Xeon 6136 3.0 2666 12C 150 CPU					
	Memory Info	768GB DDR4-2666 (24x32GB) RegRAM CPU2					
	Graphics Info	2x NVIDIA Quadro P6000					
	Disks/Optical/Floppy	HP Z Turbo Quad Pro 4x1TB + 4x 1 TB SATA SSD /1x DVDRW SATA					
	Power Supply	1450W 90% Custom PSU					
	Other	-					
Energy Consumption		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled
	Windows Idle (S0)	194.0		192.6		197.0	
	Windows Busy Typ(S0)	640.2		622.0		647.0	
	Windows Busy Max (S0)	788.0		761.3		800.6	
	Sleep (S3)	21.1	19.7	19.7	18.8	21.3	19.8
Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
	Windows Idle (S0)	662.1		657.2		672.3	
	Windows Busy Typ(S0)	2184.3		2122.3		2207.7	
	Windows Busy Max (S0)	2688.8		2597.8		2731.7	
	Sleep (S3)	72.3	67.5	67.5	64.1	72.6	67.7
NOTE: Power consumption measurements do not take advantage of the Intel Turbo Boost Technology. As a result, power consumption measurements may be higher.							

Declared Noise Emissions

System Configuration (Entry level)	Processor Info	2-Intel® Xeon® Gold 6134 processor 3.2GHz		
	Memory Info	96GB (12x8GB) DDR4-2666 ECC Memory		
	Graphics Info	1-NVIDIA® Quadro® P400 2GB		
	Disks/Optical	1-500GB SATA 7200RPM 3.5" HDD / 1-HP 9.5mm S		
	Power Supply	1125 W		

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	3.6	19
	Hard drive Operating (random reads)	3.7	19

System Technical Specifications

System Configuration (Mid-range)	Processor Info	2-Intel® Xeon® Gold 6146 processor 3.20GHz
	Memory Info	384GB (24x16GB) DDR4-2666 ECC Memory
	Graphics Info	1-NVIDIA® Quadro® P6000 24GB
	Disks/Optical	2-300GB 12Gb/s 15KRPM SAS HDD / 1-HP 9.5mm S
	Power Supply	1450 W

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWA _{Ad} , bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	3.6	20
	Hard drive Operating (random reads)	3.8	23

Environmental Data

Environmental Requirements	Temperature	Operating: 5° to 35° C (40° to 95° F) Non-operating: -40° to 60° C (-40° to 140° F)
	Humidity	Operating: 8% to 85% RH, non-condensing Non-operating: 8% to 90% RH, non-condensing
	Maximum Altitude	Operating (with Rotational Hard Drives): 3,048 m (10,000 feet) Operating (with only Solid-State Drives): 5,000 m (16,404 feet)
		Non-operating: 12,192 m (40,000ft)
		NOTE: Above 1524 m (5,000 feet) altitude, maximum operating temperature is reduced by 1° C (1.8° F) per 305 m (1,000 feet) increase in elevation.
	Dynamic (new)	Shock Operating: ½-sine: 40g, 2-3ms (~62 cm/sec) Non-operating: ½-sine: 160 cm/s, 2-3ms (~105g) square: 422 cm/s, 20g NOTE: Values represent individual shock events and do not indicate repetitive shock events.
		Vibration Operating random: 0.5g (rms), 5-300 Hz, up to 0.0025g ² /Hz Non-operating random: 2.0g (rms), 5-500 Hz, up to 0.0150 g ² /Hz NOTE: Values do not indicate continuous vibration.
	Cooling	Above 1524 m (5,000 feet) altitude, the maximum operating temperature is reduced by 1° C (1.8° F) for every 305 m (1,000 feet) increase in elevation, up to 3048 m (10,000 feet)

Physical Security and Serviceability

System Technical Specifications

Access Panel	Tool-less Includes system board and memory information.
Optical Drive	Tool-less, 2 nd Optical Drive requires a 5.25" bay carrier
Hard Drives	Tool-less
Expansion Cards	Tool-less
Processor Socket	Tool-less
Blue User Touch Points	Yes, on tool-free internal chassis components.
Color-coordinated Cables and Connectors	Yes
Memory	Tool-less
System Board	Tool-less, retained by Front Card Guide and Top Memory Fan Holder
Dual Color Power and HD	No
LED on Front of Computer	
Configuration Record SW	Yes
Over-Temp Warning on Screen	Yes. Temp-Caution and Temp Critical are provide via the WMI interface. Tools like the HPPA can display the Critical and Caution state.
Restore CD/DVD Set	Restores the computer to its original factory shipping image; can be obtained via HP Support.
Dual Function Front Power Switch	Yes, causes a fail-safe power off when held for 4 seconds
Padlock Support	No
Cable Lock Support	Yes, Kensington Cable Lock (optional): Prevents entire system theft only. 3mm x 7mm slot at rear of system
Universal Chassis Clamp Lock Support	No
Solenoid Lock and Hood Sensor	No
Rear Port Control Cover	No
Serial, USB, Audio, Network, Enable/Disable Port Control	Yes. USB disablement zones are Front, Rear and Internal
Removable Media Write/Boot Control	No
Power-On Password	Yes, prevents an unauthorized person from booting up the workstation
Setup Password	Yes, prevents an unauthorized person from changing the workstation configuration
3.3V Aux Power LED on System PCA	No
NIC LEDs (integrated) (Green & Amber)	Yes
CPUs and Heatsinks	A torx driver (T30) is needed to remove the heatsink(s). CPU attached to heatsink via tool-less clip
Power Supply Diagnostic LED	Yes
Front Power Button	Yes
Front Power LED	Yes, white (normal), red (fault)
Front Hard Drive Activity LED	Yes, white
Front ODD Activity LED	Yes

System Technical Specifications

Internal Speaker	Yes
System/Emergency ROM	Recovers corrupted system BIOS
Flash Recovery	
Cooling Solutions	Air cooled forced convection
Power Supply Fans	2x - Dual Side Inlet Blowers
CPU Heatsink Fan	80mm x 25mm 5-wire PWM for each CPU
Chassis Fan	Rear: 120mm x 38mm Front: 120mm x 25mm (PCIe zone)
Memory Heatsink Fan	Front 92mm x 25mm (upper memory bank); Front 80mm x 25mm (lower memory bank)
HP PC Hardware Diagnostics UEFI	HP PC Hardware Diagnostics (UEFI) enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing ESC then F2 upon the PC reboot, and is available as a download from HP Support.
Access Panel Key Lock	Yes, prevents removal of the access panel and all internal components including optical and storage devices
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none">Allows the system to wake from a low-power mode.Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system
Trusted Platform Module Chip	Yes
Integrated Chassis Handles	Yes, front and rear
Power Supply	Tool-less, rear access direct-connect (blind-mate)
PCIe Card Retention	Yes, tool-less Rear (all) Middle (full-height cards) Front (full-length cards with extenders)
Flash ROM	Yes.SPI ROM
Diagnostic Power Switch	Yes
LED on board	
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder	Yes
DIMM Connectors	Yes

BIOS

BIOS 32-bit Services	Standard BIOS 32-bit Service Directory Proposal v0.4 BIOS supports 32 and 64-bit Operating systems.
PCI 3.0 Support	Full BIOS support for PCI Express through industry standard interfaces.
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0.
BBS	BIOS Boot Specification v1.01.
WMI Support	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
BIOS Boot Spec 1.01+	Provides more control over how and from what devices the workstation will boot.

System Technical Specifications

BIOS Power On	Users can define a specific date and time for the system to power on.
ROM Based Computer Setup Utility (F10)	Review and customize system configuration settings controlled by the BIOS.
System/Emergency ROM Flash Recovery with Video	Recovers system BIOS in corrupted Flash ROM.
Replicated Setup	Saves BIOS settings to USB flash device in human readable file (HpSetup.txt). BiosConfigurationUtility.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).
SMBIOS	System Management BIOS 2.8, for system management information.
Boot Control	Disables the ability to boot from removable media on supported devices.
Memory Change Alert	Alerts management console if memory is removed or changed.
Thermal Alert	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none">• NORMAL - normal temperature ranges.• ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown.• SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs.
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console.
ACPI (Advanced Configuration and Power Management Interface)	Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 5.0 for full compatibility with 64-bit operating systems.
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen.
Remote Wakeup/Remote Shutdown	System administrators can power on, restart, and power off a client computer from a remote location.
Instantly Available PC (Suspend to RAM - ACPI sleep state S3)	Allows for very low power consumption with quick resume time.
Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system.
ROM revision levels	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS and WMI) so that management SW applications can use and report this information.
System board revision level	Allows management SW to read revision level of the system board. Revision level is digitally encoded into the HW and cannot be modified.
Start-up Diagnostics (Power-on Self-Test)	Assesses system health at boot time with selectable levels of testing.
Auto Setup when new hardware installed	System automatically detects addition of new hardware.
Keyboard-less Operation	The system can be booted without a keyboard.
Localized ROM Setup	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 14 languages with local keyboard mappings.
Asset Tag	The user or MIS to set a unique tag string in non-volatile memory.
Per-slot Control	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually.
Adaptive Cooling	Control parameters are set according to detected hardware configuration for optimal acoustics.
Pre-boot Diagnostics	(Pre-video) critical errors are reported via beeps and blinks on the power LED.
Industry Standard Specification Support	

System Technical Specifications

Industry Standard	Revision Supported by the BIOS
UEFI Specification	2.6
Revision	
ACPI	Advanced Configuration and Power Management Interface, Version 5.0
ATA (IDE)	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
CD Boot	"El Torito" Bootable CD-ROM Format Specification Version 1.0
EDD	- Enhanced Disk Drive Specification Version 1.1 - BIOS Enhanced Disk Drive Specification Version 3.0
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	PCI Local Bus Specification, Revision 2.3
	PCI Power Management Specification, Revision 1.1
	PCI Firmware Specification, Revision 3.0, Draft .7
PCI Express	PCI Express Base Specification, Revision 2.0
	PCI Express Base Specification, Revision 3.0
PMM	POST Memory Manager Specification, Version 1.01
SATA	Serial ATA Specification, Revision 1.0a
	Serial ATA 3 Gb/s: Serial ATA Specification, Revision 2.5
	Serial ATA 6 Gb/s: Serial ATA Specification, Revision 3.0
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
TPM	Trusted Computing Group TPM Specification Version 2.0 (Infineon SLB 9670). Common Criteria EAL4+ certified. FIPS 140-2 Certification TCG TPM Certified products list: http://www.trustedcomputinggroup.org/certification/tpm-certified-products/
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB	Universal Serial Bus Revision 1.1 Specification
	Universal Serial Bus Revision 2.0 Specification
	Universal Serial Bus Revision 3.1 Specification
SMBIOS	System Management BIOS Reference Specification, Version 2.8

External BIOS simulator found at: <http://csrsml.itcs.hp.com/>

Social and Environmental Responsibility

Eco-Label Certifications & Declarations

This product is low halogen except for HP Z Turbo Quad Pro PCIe TLC SSD, CRU QX 428 & QX448 removable storage, 10 & 25 Gb Transceivers, Intel VROC M.2 RAID module, power cords, cables, and peripherals. Service parts obtainable Halogen.

This product has received or is in the process of being certified to the following approvals and may be labeled:

- ENERGY STAR® (energy-saving features available on selected configurations-Windows only)
- US Federal Energy Management Program (FEMP)
- China Energy Conservation Program
- The ECO declaration (TED)
- TCO Certified configurations available*

*TCO Certified configurations available when ENERGY STAR configurations are selected with a USB Type-C® combination of high-performance CPU's, high-performance GPU's and select memory configurations.

The Z8 G4 is registered EPEAT® Silver in the US and Canada. EPEAT® registration varies by country. See <http://www.epeat.net> by country. Search keyword generator on HP's 3rd party option store for solar generator accessories at <http://www.hp.com>

System Technical Specifications

Batteries

The battery in this product complies with EU Directive 2006/66/EC

Battery size: CR2032 (coin cell)

Battery mass: 3g

Battery type: Lithium Metal

The battery in this product does not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 40ppm by weight

Restricted Material Usage

This product meets the material restrictions specified in HP's General Specification for the Environment.

HP Inc. is committed to compliance with all applicable environmental laws and regulations, including the European Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the Directive.

Low Halogen Statement

This product is low halogen except for power cords, external cables and peripherals. The following customer components may not be low-halogen: 3 1/2" SAS HDDs. Service parts obtained after purchase may not be low halogen.

(NOTE: optional low-halogen power cables are available for some countries in Europe)

End-of-Life Management and Recycling

HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, visit <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled in a responsible manner. This product is greater than 90% recyclable by weight when properly disposed of at end of life.

For more information about HP's commitment to the environment:
[Sustainability Report](#)

HP Inc. Corporate Environmental Information

Eco-label certifications: <http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels>

ISO 14001 certificate: <http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement/iso14001>

- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive. [WEEE Instructions](#)
- Plastic parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product is >90% recycle-able when properly disposed of at end of life.

Additional Information

HP Workstation product packaging meets the [HP's General Specification for the Environment](#)

- Does not contain restricted substances listed in HP Standard 011-1 General Specification for the Environment
- Does not contain ozone-depleting substances (ODS)
- Does not contain heavy metals (lead, mercury, cadmium or hexavalent chromium) in excess of 100 ppm
- Maximizes the use of post-consumer recycled content materials in packaging materials
- All packaging material is recyclable
- All packaging material is designed for ease of disassembly
- Reduced size and weight of packages to improve transportation fuel efficiency
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards for marking
- A multi-unit eco packaging option is available to institutional customers that uses less packaging material than conventional single-unit packaging. Please contact your sales representative for additional details.

Packaging Materials

Internal

Cushions and plastic bags made of low density polyethylene (LDPE).

External

Outer carton, accessories carton, and insert made of corrugated paper board.

Manageability

Industry Standard Specifications

This product meets the following industry standard specifications for manageability functionality:

- DASH 1.1 (via Intel® LAN on motherboard)

Intel® Active Management Technology (AMT)

An advanced set of remote management features and functionality providing IT administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 11.2x includes the following advanced management functions:

System Technical Specifications

- Power Management (on, off, reset, graceful shutdown, sleep and hibernate)
 - Support in Max Power Savings (Shutdown and Hibernate Modes)
- Hardware Inventory (includes BIOS and firmware revisions)
- Hardware Alerting
- Agent Presence
- System Defense Filters
- Serial Over LAN (SOL)
- USB Redirect (Media Redirection)
- ME Wake-on-LAN (WOL), even with Maximum Power Savings Enabled
- DASH 1.1 compliance
- IPv6 Support
- Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection
- Remote Scheduled Maintenance - pre-schedule when the system connects to the IT or service provider console for maintenance.
- Remote Alerts - automatically alert IT or service provider if issues arise
- Access Monitor - Provides oversight into Intel® AMT actions to support security requirements
- PC Alarm Clock
- Microsoft NAP Support
- Host Base set-up and configuration
- Management Engine (ME) firmware roll back
- Local Time Sync to UTC
- Remote Memory Dump Command - Creates memory dump for debug

Intel® vPro™ Technology The HP Z8 G4 Workstation supports Intel® vPro™ technology when configured as outlined below:

- Intel® Xeon® processor E5-1600v5 or E5-2600v5 product family featuring Intel® vPro™ Technology
- Intel® C622 chipset
- Intel® I219LM GbE LAN

Remote Manageability Software Solutions

The HP Z8 G4 Workstation is supported on the following remote manageability software consoles:

- LANDesk Management Suite (HP recommended solution)
- Microsoft System Center Configuration Manager
- HP Client Automation Enterprise

For questions or support for manageability needs, please visit <http://www.hp.com/go/clientmanagement>

System Software Manager

Service, Support, and Warranty

For questions or support for SSM, please visit: <http://www.hp.com/go/ssm>

On-site Warranty and Service (Note 1): Three-years, limited warranty and service offering delivers on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 8am - 5pm. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering. 24/7 operation will not void the HP warranty.

NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply.

NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some countries.

HP Care Pack Services are extended service contracts that go beyond the standard limited warranties.

Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>. Service levels and response times for HP Care Packs may vary depending on your geographic location. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such

System Technical Specifications

Certification and Compliance

rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

Environmental Sustainability questions concerning:

Ecolabels (EPEAT, TCO, etc.)

ENERGY STAR, California Energy Commission (CEC)

Compliance with Environmental legislation (EU ErP, China CECP, EU RoHS and other countries)

Supply Chain Social Environmental Responsibility (SER) (conflict minerals; human rights, etc.)

Product specific environmental features (material content, packaging content, recycled content, etc.)

China Energy Label (CEL)

Please contact sustainability@hp.com

For country specific Regulatory Compliance approval documents or Regulatory and Safety questions concerning:

Declarations of Conformity (for self-service, go to https://www.hp.com/uk-en/certifications/technical/regulations-certificates.html?jumpid=ex_r135_uk/en/any/corp/hpuk-mu_chev/certificates)

GS Certificates

Product Safety Certificates (UL, CB, BIS, etc.)

EMC Certificates, Declarations of Conformity, or Certificates of Conformity (CE, FCC, ICES, etc.)

CCC Certificates

Ergonomics

Please contact techregshelp@hp.com

Product Change Notification

- Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile.
- PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition.
- Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.

Stable & Consistent Offerings

Global Series SKUs As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of hardware and software designed and tested to work with all HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section.

Stable & Consistent Offerings HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers-no special programs, no additional cost-no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

Processors	Product #	Offering
	2DL76AV	Intel® Xeon® Gold 6128 processor
	2DL77AV / 1XM69AA	Intel® Xeon® Gold 6128 2 nd processor
	2DL66AV	Intel® Xeon® Silver 4114 processor
	2DL67AV / 1XM74AA	Intel® Xeon® Silver 4114 2 nd processor
	2DL62AV	Intel® Xeon® Silver 4108 processor
	2DL63AV / 1XM76AA	Intel® Xeon® Silver 4108 2 nd processor

Hard Drives	Product #	Offering
	Z5J60AV / LQ037AA	1TB SATA 7200 RPM 3.5" HDD
	Z5J61AV	1TB 7200RPM SATA 3.5in 2 nd
	Z5J64AV	1TB 7200RPM SATA 3.5in 3 rd
	Z5J62AV	1TB 7200RPM SATA 3.5in 4 th
	Z5J63AV	1TB 7200RPM SATA 3.5in 5 th

Graphics	Product #	Offering
	N/A	N/A

Memory	Product #	Offering
	N/A	N/A

Optical and Removable Storage	Product #	Offering
	N/A	N/A

Technical Specifications - Processors

Intel® Xeon® Platinum 8260L processor

Intel® Xeon® Gold 6258R processor

Intel® Xeon® Gold 6248R processor

Intel® Xeon® Gold 6246R processor

Intel® Xeon® Gold 6244 processor

Intel® Xeon® Gold 6242R processor

Intel® Xeon® Gold 6242 processor

Intel® Xeon® Gold 6240 processor

Intel® Xeon® Gold 6238R processor

Intel® Xeon® Gold 6230R processor

Intel® Xeon® Gold 6226R processor

Intel® Xeon® Gold 6226 processor

Intel® Xeon® Gold 6136 processor

Intel® Xeon® Gold 6128 processor

Intel® Xeon® Gold 5222 processor

Intel® Xeon® Gold 5220R processor

Intel® Xeon® Gold 5218R processor

Intel® Xeon® Gold 5218 processor

Intel® Xeon® Gold 5118 processor

Intel® Xeon® Gold 4216 processor

Intel® Xeon® Gold 4215R processor

Intel® Xeon® Gold 4214R processor

Intel® Xeon® Gold 4214 processor

Intel® Xeon® Gold 4210R processor

Intel® Xeon® Gold 4210 processor

Intel® Xeon® Gold 4208 processor

Intel® Xeon® Silver 4114 processor

Intel® Xeon® Silver 4108 processor

Intel® Xeon® Bronze 3206R processor

Intel® Xeon® Bronze 3204 processor

Technical Specifications - Hard Drives

Storage/Hard Drives

HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations	HP 300GB SAS 15K SFF HDD	Capacity	300GB
		Height	5.9 in; 15 cm
		Width	Media Diameter 3.5 in; 8.9 cm
		Interface	12Gb/s SAS
		Synchronous Transfer Rate (Maximum)	Up to 1200 MB/s (SAS single port)*
		Buffer	128MB
		Seek Time (typical reads, includes controller overhead, including settling)	Average 2.0ms *
		Rotational Speed	15K rpm
		Operating Temperature	41° to 131° F (5° to 55° C)

*Actual performance may vary.

SATA (Serial ATA) Hard Drives for HP Workstations	500GB SATA 7200 rpm 6Gb/s 3.5" HDD	Capacity	500GB
		Height	1 in; 2.54 cm
		Width	Media Diameter 3.5 in; 8.9 cm
		Physical Size	4 in; 10.17 cm
		Interface	Serial ATA (6.0Gb/s), NCQ enabled
		Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
		Buffer	16MB
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track 2 ms* Average 11 ms* Full Stroke 21 ms*
		Rotational Speed	7,200 rpm
		Logical Blocks	976,773,168
		Operating Temperature	41° to 131° F (5° to 55° C)

*Actual performance may vary.

1TB SATA 7200 rpm 6Gb/s 3.5" HDD	Capacity	1TB
	Height	1 in; 2.54 cm
	Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size	4 in; 10.17 cm
	Interface	Serial ATA (6.0Gb/s), NCQ enabled
	Synchronous Transfer Rate (Maximum)	Up to 600 MB/s*

Technical Specifications - Hard Drives

Buffer	64MB
Cache	Adaptive
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 2 ms* Average 11 ms* Full Stroke 21 ms*
Rotational Speed	7,200 rpm
Operating Temperature	41° to 131° F (5° to 55° C)

*Actual performance may vary.

2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD CMR	Capacity	2.0TB
	Height	1 in; 2.54 cm
	Width	3.5 in; 8.9 cm
	Media Diameter	4 in; 10.17 cm
	Physical Size	
	Interface	Serial ATA (6.0 Gb/s), NCQ Enabled
	Synchronous Transfer Rate (Maximum)	Up to 600 MB/s*
	Buffer	64MB
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 1.0 ms* Average 11 ms* Full Stroke 18 ms*
	Rotational Speed	7,200 rpm
	Logical Blocks	3,907,029,168
	Operating Temperature	41° to 131° F (5° to 55° C)

*Actual performance may vary.

2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD SMR	Capacity	2.0TB
	Height	1 in; 2.02 cm
	Width	3.5 in; 8.9 cm
	Media Diameter	4 in; 10.16 cm
	Physical Size	
	Interface	Serial ATA (6.0 Gb/s), NCQ Enabled
	Synchronous Transfer Rate (Maximum)	Up to 600 MB/s*
	Buffer	256MB
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 1.2 ms* Average 12 ms* Full Stroke 21 ms*
	Rotational Speed	7,200 rpm
	Logical Blocks	3,907,029,168
	Operating Temperature	41° to 140° F (5° to 60° C)

*Actual performance may vary.

Technical Specifications - Hard Drives

1TB SATA 7200 rpm 6Gb/s 3.5" HDD (Enterprise Class)	Capacity	1TB
	Protocol	SATA
	Form Factor	3.5"
	Controller	AHCI
	Reliability (MTBF)	2.0M hours
	Rated Power On Hours	8760/yr
	Annualized Failure Rate (based on Rated POH)	<0.62%
	Rated for 24/7/365 operation	YES
	Physical Size (Height)	1 in; 2.54 cm
	Physical Size (Width)	4 in; 10.17 cm
	Media Diameter	3.5 in; 8.9 cm
	Interface	Serial ATA (6Gb/s), NCQ enabled
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
	Buffer	128MB
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.32ms* Average 7.45ms* Full Stroke 14.2ms*
	Operating Temperature	41° to 140° F (5° to 60° C)
	Performance	Sequential Read up to 226MB/s* Sequential Write up to 226MB/s*
	Enterprise Class Features	High Reliability

4TB SATA 7200 rpm 6Gb/s 3.5" HDD (Enterprise Class)	Capacity	4TB
	Height	0.275 in; 0.7 cm
	Width	2.5 in; 6.36 cm
	Media Diameter	2.75 in; 6.99 cm
	Physical Size	2.75 in; 6.99 cm
	Interface	Serial ATA (6Gb/s), NCQ enabled
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
	Buffer	128MB
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.7ms* Average 8.5ms* Full Stroke 15.7ms*
	Rotational Speed	7,200 rpm
	Operating Temperature	32° to 140° F (0° to 60° C)

*Actual performance may vary.

Technical Specifications - Hard Drives

500GB SATA 7.2K SED SFF HDD	Capacity	500GB
	Height	0.275 in; 0.7 cm
	Width	Media Diameter 2.5 in; 6.36 cm
		Physical Size 2.75 in; 6.99 cm
	Interface	Serial ATA (6Gb/s)
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
	Buffer	32MB
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 1ms* Average 4.2ms* Full Stroke 25ms (typical)*
	Rotational Speed	7,200 rpm
	Operating Temperature	32° to 140° F (0° to 60° C)

*Actual performance may vary.

SATA SSDs for HP Workstations

HP 256GB SATA 6Gb/s SSD	Capacity	256GB
	Protocol	SATA
	Form Factor	2.5"
	Controller	AHCI
	NAND Type	3D TLC
	Endurance	192TBW (TB Written)
	Reliability (MTTF)	1.5M hours
	Physical Size (Height)	0.28 in; 0.7 cm
	Physical Size (Width)	2.5 in; 6.36 cm
	Interface	SATA 6Gb/s
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 530MB/s (max)* Sequential Write 500MB/s (max)* Random Read 55K IOPS (max)* Random Write 83K IOPS (max)*

*Actual performance may vary.

Technical Specifications - Hard Drives

HP 256GB SATA 6Gb/s SED Opal 2 SSD	Capacity	256GB
	Protocol	SATA
	Form Factor	2.5"
	Controller	AHCI
	NAND Type	3D TLC
	Endurance	192TBW (TB Written)
	Reliability (MTTF)	1.5M hours
	Physical Size (Height)	0.28 in; 0.7 cm
	Physical Size (Width)	2.5 in; 6.36 cm
	Interface	6Gb/s SATA
	Synchronous Transfer Rate	Up to 550MB/s (Sequential Read)* (Maximum)
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 530MB/s* Sequential Write 500 MB/s* Random Read 55K IOPS* Random Write 83K IOPS*
	Self-Encrypting Drive Support	OPAL 2

*Actual performance may vary.

HP 512GB SATA 6Gb/s SSD	Capacity	512GB
	Protocol	SATA
	Form Factor	2.5"
	Controller	AHCI
	NAND Type	3D TLC
	Endurance	388TBW (TB Written)
	Reliability (MTTF)	1.5M hours
	Physical Size (Height)	0.28 in; 0.7 cm
	Physical Size (Width)	2.5 in; 6.36 cm
	Interface	SATA 6Gb/s
	Synchronous Transfer Rate	Up to 550MB/s (Sequential Read)* (Maximum)
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 530 MB/s* Sequential Write 500 MB/s* Random Read 95K IOPS* Random Write 83K IOPS*

*Actual performance may vary.

Technical Specifications - Hard Drives

HP 512GB SATA SED SSD	Capacity	512GB
	Protocol	SATA
	Form Factor	2.5"
	Controller	AHCI
	NAND Type	3D TLC
	Endurance	388TBW (TB Written)
	Reliability (MTTF)	1.5M hours
	Physical Size (Height)	0.28 in; 0.7 cm
	Physical Size (Width)	2.5 in; 6.36 cm
	Interface	SATA 6Gb/s
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
	Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read	530 MB/s*
	Sequential Write	500 MB/s*
	Random Read	95K IOPS*
	Random Write	83K IOPS*
Self-Encrypting Drive Support	OPAL 1 and 2	

*Actual performance may vary.

HP 1TB SATA 6Gb/s SSD	Capacity	1TB
	Protocol	SATA
	Form Factor	2.5"
	Controller	AHCI
	NAND Type	3D TLC
	Endurance	400TBW (TB Written)
	Reliability (MTTF)	1.5M hours
	Physical Size (Height)	0.28 in; 0.7 cm
	Physical Size (Width)	2.5 in; 6.36 cm
	Interface	SATA 6Gb/s
	Synchronous Transfer Rate (Maximum)	Up to 550MB/s (Sequential Read)*
	Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read	530 MB/s*
	Sequential Write	500 MB/s*
	Random Read	95K IOPS*
	Random Write	83K IOPS*

*Actual performance may vary.

Technical Specifications - Hard Drives

HP 2TB SATA 6Gb/s SSD	Capacity	2TB
	Protocol	SATA
	Form Factor	2.5"
	Controller	AHCI
	NAND Type	3D TLC
	Endurance	400TBW (TB Written)
	Reliability (MTTF)	1.5M hours
	Physical Size (Height)	0.28 in; 0.7 cm
	Physical Size (Width)	2.5 in; 6.36 cm
	Interface	SATA 6Gb/s
	Synchronous Transfer Rate	Up to 550MB/s (Sequential Read)* (Maximum)
	Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read	530 MB/s*
	Sequential Write	500 MB/s *
	Random Read	95K IOPS*
	Random Write	83K IOPS*

*Actual performance may vary.

HP Enterprise Class 240GB SATA SSD	Capacity	240GB
	Protocol	SATA
	Form Factor	2.5"
	Controller	AHCI
	NAND Type	3D TLC
	Endurance	2,200TBW (TB Written)
	Reliability (MTTF)	2.0M hours
	Physical Size (Height)	0.28 in; 0.7 cm
	Physical Size (Width)	2.5 in; 6.36 cm
	Interface	6Gb/s SATA
	Synchronous Transfer Rate	Up to 600MB/s* (Maximum)
	Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read	540 MB/s*
	Sequential Write	310 MB/s*
	Random Read	93K IOPS*
	Random Write	48K IOPS*
Enterprise Class Features	High Endurance NAND Power Loss Protection End-to-End Data Protection	

*Actual performance may vary.

Technical Specifications - Hard Drives

HP Enterprise Class 480GB SATA SSD	Capacity	480GB
	Protocol	SATA
	Form Factor	2.5"
	Controller	AHCI
	NAND Type	3D TLC
	Endurance	4,400TBW (TB Written)
	Reliability (MTTF)	2.0M hours
	Physical Size (Height)	0.28 in; 0.7 cm
	Physical Size (Width)	2.5 in; 6.36 cm
	Interface	6Gb/s SATA
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
	Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read	540 MB/s*
	Sequential Write	460 MB/s*
	Random Read	93K IOPS*
	Random Write	74K IOPS*
Enterprise Class Features	High Endurance NAND	
	Power Loss Protection	
	End-to-End Data Protection	

*Actual performance may vary.

Performance PCIe SSDs for HP Workstations	HP Z Turbo Drive 256GB M.2 Capacity	256GB
	Protocol	PCIe
	Form Factor	M.2
	Controller	NVMe
	NAND Type	3D TLC
	SED Support	Opal 2
	Endurance	200TB
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read	3500 MB/s *
	Sequential Write	2200 MB/s *
	Random Read	240K IOPS *
	Random Write	480K IOPS *

*Actual performance may vary.

Technical Specifications - Hard Drives

HP ZTurbo Drive 512GB M.2 2280 TLC SSD	Capacity	512GB
	Protocol	PCIe
	Form Factor	M.2
	Controller	NVMe
	NAND Type	3D TLC
	SED Support	Opal 2
	Endurance	300TB
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3500 MB/s* Sequential Write 2900 MB/s* Random Read 460 K IOPS* Random Write 500K IOPS*

*Actual performance may vary.

HP ZTurbo Drive 1TB M.2 2280 TLC SSD	Capacity	1TB
	Protocol	PCIe
	Form Factor	M.2
	Controller	NVMe
	NAND Type	3D TLC
	SED Support	Opal 2
	Endurance	400TB
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3500 MB/s* Sequential Write 3000 MB/s* Random Read 580K IOPS* Random Write 500K IOPS*

*Actual performance may vary.

Technical Specifications - Hard Drives

HP ZTurbo Drive 2TB M.2 2280 TLC SSD	Capacity	2TB
	Protocol	PCIe
	Form Factor	M.2
	Controller	NVMe
	NAND Type	3D TLC
	SED Support	Opal 2
	Endurance	500TB
	Reliability (MTTF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3300 MB/s* Sequential Write 2400 MB/s* Random Read 500K IOPS* Random Write 440K IOPS*

*Actual performance may vary.

Performance PCIe SSDs for HP Workstations	HP Z Turbo Drive Quad Pro 2x256GB PCIe TLC SSD	Capacity	512GB
		Protocol	PCIe
		Form Factor	PCIe Card, Full Height PCIe Slot
		Controller	NVMe
		NAND Type	3D TLC
		SED Support	Opal 2
		Endurance	200TB
		Reliability (MTBF)	1.5M hours
		Interface	PCIe Gen3 x4 architecture
		Operating Temperature	32° to 158° F (0° to 70° C)
		Performance	Sequential Read 3500 MB/s* Sequential Write 2200 MB/s* Random Read 240K IOPS* Random Write 480K IOPS*

*Actual performance may vary.

Technical Specifications - Hard Drives

HP Z Turbo Drive Quad Pro 2x512GB PCIe TLC SSD	Capacity	1TB
	Protocol	PCIe
	Form Factor	PCIe Card, Full Height PCIe Slot
	Controller	NVMe
	NAND Type	3D TLC
	SED Support	Opal 2
	Endurance	300TB
	Reliability (MTBF)	1.5M hours
	Interface	PCIe Gen3 x4 architecture
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3500 MB/s* Sequential Write 2900 MB/s* Random Read 460 K IOPS* Random Write 500K IOPS*

*Actual performance may vary.

HP Z Turbo Drive Quad Pro 2x1TB PCIe TLC SSD	Capacity	2TB
	Protocol	PCIe
	Form Factor	PCIe Card, Full Height PCIe Slot
	Controller	NVMe
	NAND Type	3D TLC
	SED Support	Opal 2
	Endurance	400TB
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3500 MB/s* Sequential Write 3000 MB/s* Random Read 580K IOPS* Random Write 500K IOPS*

*Actual performance may vary.

Technical Specifications - Hard Drives

HP Z Turbo Drive Dual Pro	Capacity	256GB
256GB SSD	Protocol	PCIe
	Form Factor	M.2 in Half-height, half-length card
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	200TBW (TB Written)
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3500 MB/s* Sequential Write 2200 MB/s* Random Read 240K IOPS* Random Write 480K IOPS*

*Actual performance may vary.

HP Z Turbo Drive Dual Pro	Capacity	512GB
512GB SSD	Protocol	PCIe
	Form Factor	M.2 in Half-height, half-length card
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	300TBW (TB Written)
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3500 MB/s* Sequential Write 2900 MB/s* Random Read 460 K IOPS* Random Write 500K IOPS*

*Actual performance may vary.

Technical Specifications - Hard Drives

HP Z Turbo Drive Dual Pro	Capacity	1TB
1TB SSD	Protocol	PCIe
	Form Factor	M.2 in Half-height, half-length card
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	400TBW (TB Written)
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3500 MB/s* Sequential Write 3000 MB/s* Random Read 580K IOPS* Random Write 500K IOPS*

*Actual performance may vary.

HP Z Turbo Drive Dual Pro	Capacity	2TB
2TB SSD	Protocol	PCIe
	Form Factor	M.2 in Half-height, half-length card
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	500TBW (TB Written)
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3500 MB/s* Sequential Write 3000 MB/s * Random Read 600K IOPS* Random Write 500K IOPS*

*Actual performance may vary.

Mainstream PCIe SSDs for HP Workstations	HP 256GB M.2 2280 TLC SSD	Capacity	256GB
		Protocol	PCIe
		Form Factor	M.2
		Controller	NVMe
		NAND Type	3D TLC
		Endurance	200TB
		Reliability (MTBF)	1.5M hours
		Interface	PCI Express 3.0 x4 electrical x4 physical
		Operating Temperature	32° to 158° F (0° to 70° C)

Technical Specifications - Hard Drives

Performance	Sequential Read	3100 MB/s *
	Sequential Write	1400 MB/s *
	Random Read	200 K IOPS *
	Random Write	320 K IOPS *

*Actual performance may vary.

HP 512GB M.2 2280 TLC SSD	Capacity	512GB
	Protocol	PCIe
	Form Factor	M.2
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	300TB
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3300 MB/s* Sequential Write 2500 MB/s* Random Read 225 K IOPS* Random Write 430 K IOPS*

*Actual performance may vary.

HP 1TB M.2 2280 TLC SSD	Capacity	1TB
	Protocol	PCIe
	Form Factor	M.2
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	400TB
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3300 MB/s* Sequential Write 2500 MB/s* Random Read 400 K IOPS* Random Write 440 K IOPS*

*Actual performance may vary.

Technical Specifications - Hard Drives

HP 2TB M.2 2280 TLC SSD	Capacity	2TB
	Protocol	PCIe
	Form Factor	M.2
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	500TB
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	Sequential Read 3300 MB/s* Sequential Write 2700 MB/s* Random Read 430 K IOPS* Random Write 500 K IOPS*

*Actual performance may vary.

Intel® 905p Series AIC PCIe SSD	Intel® 905p Series AIC 280GB PCIe SSD	Capacity	280GB
		Protocol	PCIe
		Form Factor	PCIe Card, Half Height
		Controller	NVMe
		NVM Type	3DXPoint
		Endurance	5.11 PBW (PB Written)
		Reliability (MTBF)	1.6M hours
		Operating Temperature	32° to 185° F (0° to 85° C)
		Performance	Sequential Read 2730 MB/s* Sequential Write 2280 MB/s* Random Read 587K IOPS* Random Write 559K IOPS*

*Actual performance may vary.

Intel® 905p Series AIC 480GB PCIe SSD	Capacity	480GB
	Protocol	PCIe
	Form Factor	PCIe Card, Half Height
	Controller	NVMe
	NVM Type	3DXPoint
	Endurance	8.76 PBW (PB Written)
	Reliability (MTBF)	1.6M hours
	Operating Temperature	32° to 185° F (0° to 85° C)
	Performance	Sequential Read 2710 MB/s* Sequential Write 2280 MB/s* Random Read 582K IOPS* Random Write 561K IOPS*

Technical Specifications - Hard Drives

*Actual performance may vary.

Intel® Optane™ DC Persistent Memory	Intel® Optane™ DC Persistent Memory 128GB Module	Capacity	128GB
		Protocol	DDR-T
		Form Factor	DDR4
		Controller	NVMe
		NVM Type	3DXPoint
		Endurance	292 PBW (256B Sequential Write) 91 PBW (64B Sequential Write)
		Reliability (MTBF)	2M hours
		Operating Temperature	32° to 185° F (0° to 85° C)
		Performance	Sequential Read 6800 MB/s* Sequential Write 1850 MB/s*

*Actual performance may vary.

Technical Specifications - Hard Drive Controllers

Hard Drive Controllers

MicroSemi 2100-4i4e 8-port SAS 12Gb/s RAID Card	PCI Bus	8 lanes, PCI Express 3.0
	RAID Levels	Offers Integrated RAID (0, 1, and 10)
	PCI Data Burst Transfer Rate	Half Duplex x8, PCIe, 8000 MB/s
	SAS Bandwidth	Half Duplex 1200 MB/s per lane
	PCI Card Type	3.3V Add-in Card
	PCI Voltage	12 V ± 10%
	PCI Power	9.8W typical, Airflow min 200 LFM
	Bracket	Full height and low profile
	Certification Level	PCI Express 3.0 compliant
	SAS Processor	MicroSemi Series 8 SAS Controller
	Internal Connectors	One x4 internal mini-SASHD (SFF-8643)
	External Connectors	One x4 external mini-SASHD (SFF-8644)
	Maximum Number of SCSI Devices	256 Non-RAID SAS/SATA devices
	LED Indicators	Connector for Drive Activity Light NOTE: RAID 5 is not supported on MicroSemi 2100-4i4e 8-port SAS 12Gb/s RAID Card

Technical Specifications - Graphics

Graphics

NVIDIA® Quadro® P620	Form Factor	Dimensions: 2.713" H x 5.7" L Single Slot, Low Profile Cooling: Active Weight: 129 grams
2GB Graphics	Graphics Controller	NVIDIA® Quadro® P620 Graphics Card GP107 GPU 512 CUDA cores Max Power: 40 Watts
	Bus Type	PCI Express 3.0 x16
	Memory	Size: 2 GB GDDR5, 2000 MHz Memory Interface: 128-bit Memory Bandwidth: 64 GB/s
	Connectors	4mDP Outputs *
	Maximum Resolution	DisplayPort™ 1.4: - up to 4x 5120 x 2880 x 24 bpp @ 60Hz - supports Multi-Stream Transport (MST)
	Image Quality Features	10-bit internal display processing pipeline 10-bit scan-out support
	Display Output	4 mDP Connectors
	Shading Architecture	Full Microsoft DirectX 12 Shader Model 5.1
	Supported Graphics APIs	OpenGL 4.5 DirectX 12 Vulkan 1.0 API support includes: CUDA C, CUDA C++, DirectCompute , OpenCL
	Available Graphics Drivers	Windows 11 Windows 10 Windows 7 (via nvidia.com) Linux®
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
Notes	*P620 only have mini-DisplayPort™ (mDP) video ports.	
	Factory Configured (Z4 G4/ Z6 G4/ Z8 G4 Workstations): No adapters included After market option kit:Two mDP-to-DP Adapters included	
	Additional mDP-to-DP Adapters are available as Factory Configuration or Option Kit accessories:	
	<ul style="list-style-type: none">- 2MY05AA - HP miniDP-to-DP Adapter Cables- 2KW87A6 - HP (Bulk 12) miniDP-to-DP Adapter Cables	

Technical Specifications - Graphics

NVIDIA® T400 4GB Graphics	Form Factor	Dimensions: 2.713" H x 6.137" L Single Slot, Low Profile Weight: 124g
	Graphics Controller	NVIDIA® T400 Graphics Card GPU: 384 CUDA cores Power: 30 Watts Cooling: Active
	Bus Type	PCI Express 3.0 x16
	Memory	Size: 4 GB GDDR6 Memory Interface: 64-bit Memory Bandwidth: 80 GB/s
	Connectors	3x mDP
	Maximum Resolution	3x 5120 x 2880 x 24 bpp @ 60Hz
	Supported Graphics APIs	OpenGL 4.5 DirectX 12 Vulkan 1.0 API support includes: CUDA, OpenCL 1.x
	Available Graphics Drivers	Windows 11 Windows 10 Linux
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html

NVIDIA® Quadro® P1000 4GB Form Factor Graphics	Dimensions: 2.713" H x 5.7" L Single Slot, Low Profile Cooling: Active Weight: 129 grams
	Graphics Controller
	NVIDIA® Quadro® P1000 Graphics Card GP107-860 GPU 640 NVIDIA® CUDA® cores Max Power: 47 Watts
	Bus Type
	PCI Express 3.0 x16
	Memory
	Size: 4 GB GDDR5, 2500 MHz Memory Interface: 128-bit memory interface Memory Bandwidth: 80 GB/s memory bandwidth
	Connectors
	4mDP Outputs
	Maximum Resolution
	DisplayPort™ 1.4: - up to 4x 5120 x 2880 x 24 bpp @ 60Hz - supports Multi-Stream Transport (MST)
	Image Quality Features
	10-bit internal display processing pipeline 10-bit scan-out support

Technical Specifications - Graphics

Display Output	4 mDP Connectors
Shading Architecture	Full Microsoft DirectX® 12 Shader Model 5.1
Supported Graphics APIs	OpenGL® 4.5 DirectX® 12 Vulkan™ 1.0 API support includes: CUDA C, CUDA C++, DirectCompute, OpenCL™
Available Graphics Drivers	Windows 11 Windows 10 Windows 7 (via nvidia.com) Linux®
Notes	HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html

AMD Radeon™ Pro WX 3200 Form Factor	Low-Profile Single Slot (2.75 "H x 6.6" L)
4GB Graphics	Graphics Controller Radeon™ Pro WX 3200 Graphics Card GPU: 640 Stream Processors organized into 8 Compute Units Power: 56 Watts Cooling: Active
	Memory 4GB GDDR5 memory Memory Bandwidth: 6 Gbps / 96 GB/s Memory Width: 128 bit
	Connectors 2x Mini DisplayPort™ 1.4 plus 1x DisplayPort™ 1.4 - HDR ready connectors with HBR3 and MST support. Factory Configured: No adapters included After market option kit: One mDP-to-DP cable adapters included
	Additional Mini DisplayPort™-to-DisplayPort™, DisplayPort™-to-VGA or DisplayPort™-to-DVI adapters are available as Factory Configuration or Option Kit accessories.
	Maximum Resolution 5K support @ 60Hz <ul style="list-style-type: none">• 1x single-cable 5K monitor, or 2x dual-cable 5K monitors 3x 4K support @ 60Hz
	Image Quality Features Advanced support for 8-bit and 10-bit per RGB color component. High bandwidth scaler for high quality up and downscaling
	Display Output 3 full physical DP1.3 HBR3 / DP1.4 HDR outputs FreeSync support
	GPU Architecture Supported Graphics APIs Polaris DirectX®12 OpenGL® 4.5 OpenCL™ 2.0 Vulkan™ 1.0
	Available Graphics Drivers Windows 11 Windows 10 (Windows® 7 64-bit available from AMD) Linux® 64-bit (selected Enterprise distributions)

Technical Specifications - Graphics

HP qualified drivers may be preloaded or available from the HP support Web site:
<http://welcome.hp.com/country/us/en/support.html>

Notes	1. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support.
	2. AMD PowerTune and AMD ZeroCore Power are technologies offered by certain FirePro™ and Radeon™ Pro products, which are designed to intelligently manage GPU power consumption in response to certain GPU load conditions.
	3. As of September 2016, certified for DisplayPort™ 1.4 HBR3 and ready for DisplayPort™ 1.4 HDR based on independent verification by DisplayPort™ testing authority. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support.

NVIDIA® T1000 4GB Graphics

Form Factor	Dimensions: 2.713" H x 6.137" L Single Slot Weight: 132.6 grams
Graphics Controller	NVIDIA® T1000 Graphics Card Power: 50W Cooling: Active
Bus Type	PCI Express 3.0 x16
Memory	Size: 4GB GDDR6 Memory Bandwidth: Up to 160 GB/s Memory Width: 128-bit
Connectors	4x mini DisplayPort™ 1.4a
Maximum Resolution	7680 x 4320 @ 120Hz
Display Output	Maximum number of displays: 4 displays
Architecture	NVIDIA® Turing™
Supported Graphics APIs	xx
Available Graphics Drivers	Windows 11 Windows 10 Windows 8.1 Windows 7 Professional Linux® - Full OpenGL® implementation, complete with NVIDIA® Quadro® and ARB extensions

HP qualified drivers may be preloaded or available from the HP support Web site:
<http://welcome.hp.com/country/us/en/support.html>

Technical Specifications - Graphics

NVIDIA® T1000 8GB and NVIDIA® Long-Life T1000E 8GB	Form Factor	Dimensions: 2.713" H x 6.137" L Single Slot Weight: 132.6 grams
	Graphics Controller	NVIDIA® T1000 Graphics Card Power: 50W Cooling: Active
	Bus Type	PCI Express 3.0 x16
	Memory	Size: 8GB GDDR6 Memory Bandwidth: Up to 160 GB/s Memory Width: 128-bit
	Connectors	4x mini DisplayPort™ 1.4a
	Maximum Resolution	7680 x 4320 @ 120Hz
	Display Output	Maximum number of displays: 4 displays
	Architecture	NVIDIA® Turing™
	Available Graphics	Windows 11
	Drivers	Windows 10 Windows 8.1 Windows 7 Professional Linux® - Full OpenGL® implementation, complete with NVIDIA® Quadro® and ARB extensions
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
NVIDIA® RTX A2000 6GB Graphics	Form Factor	Dimensions: 2.713" H x 6.6" L Dual slot, half-height Weight: 295 grams (without extender)
	Graphics Controller	NVIDIA® RTX A2000 Graphics Card Power: 70W Cooling: Active
	Bus Type	PCI Express 4.0 x16
	Memory	Size: 6GB GDDR6 Memory Bandwidth: Up to 288 GB/s Memory Width: 192-bit
	Connectors	4x mini-DisplayPort™ 1.4a
	Maximum Resolution	Up to 4x 5120 x 2880 x 24bpp @ 60Hz
	Architecture	NVIDIA® Ampere™
	Supported Graphics APIs	CUDA, OpenCL™ 1.x
	Available Graphics	Windows 11
	Drivers	Windows 10 Linux® 64-bit (selected Enterprise distributions) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
	Notes	<ol style="list-style-type: none">1. RTX A2000 offered as Factory Configured Option does not include a video cable adapter. Video cable adapters must be ordered separately as AMO:<ol style="list-style-type: none">a. 2MY05AA - HP Single miniDP-to-DP Adapter Cableb. 2KW87A6 - HP (Bulk 12) miniDP-to-DP Adapter Cables

Technical Specifications - Graphics

- Two mDP-to-DP adapters are included with the RTX A2000 when it is ordered as an AMO kit.

NVIDIA® RTX A4000 16GB Graphics	Form Factor	Full-Height Single Slot (4.4"□ Height x 9.5"□ Length)
	Graphics Controller	NVIDIA® RTX A4000 Graphics GPU: 6144 NVIDIA® CUDA® Parallel Processing Cores Power: 140 Watts Cooling: Active
	Memory	16GB GDDR6 memory Memory Bandwidth: Up to 448 GB/s Memory Width: 256 bit
	Connectors	4x DP One 6-pin auxiliary power connector
		Factory configured option: No video cable adapter included with card. After market option Kit: No video cable adaptor included with card.
		DVI to VGA, DisplayPort™ to VGA, DisplayPort™ to DVI, and DisplayPort™ to Dual-Link DVI adapters available as accessories.
	Maximum Resolution	7680x4320 @ 60Hz
	Display Outputs¹	4x DP
	Supported Graphics APIs	DirectX®12, OpenGL® 4.5, OpenCL™ 1.0, Vulkan™ 1.0 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
	Available Graphics Drivers	Windows 11 Windows 10 Linux® 64-bit
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html

Technical Specifications - Graphics

NVIDIA® RTX A4500 20GB Graphics	Form Factor	Full-Height Dual Slot (4.4" Height x 10.5" Length)
	Graphics Controller	NVIDIA® RTX A4500 Graphics GPU: 7168 NVIDIA® CUDA® Parallel Processing Cores Power: 200 Watts Cooling: Active
	Memory	20GB GDDR6 memory Memory Bandwidth: Up to 640 GB/s Memory Width: 320 bit
	Connectors	4x DP One 8-pin auxiliary power connector
		Factory configured option: No video cable adapter included with card. After market option Kit: No video cable adaptor included with card.
		DVI to VGA, DisplayPort™ to VGA, DisplayPort™ to DVI, and DisplayPort™ to Dual-Link DVI adapters available as accessories.
	Maximum Resolution	7680x4320 @ 60Hz
	Display Outputs¹	4x DP
	Supported Graphics APIs	DirectX®12, OpenGL® 4.5, OpenCL™ 1.0, Vulkan™ 1.0 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
	Available Graphics Drivers	Windows 11 Windows 10 Linux® 64-bit
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html

NVIDIA® RTX A5000 24GB Graphics	Form Factor	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 1049 grams + 80 grams extender
	Graphics Controller	NVIDIA® RTX A5000 GPU: 8192 CUDA Cores Power: 230W Cooling: Active
	Memory	24GB GDDR6 Memory Bandwidth: Up to 768GB/s ECC Memory (disabled by default)
	Connectors	DP (x4) with HDR support One 8-pin auxiliary power connector
		After market option Kit: no power adapter included with card.
		DisplayPort™ to VGA, DisplayPort™ to DVI (single-link and dual-link), and DisplayPort™ to HDMI adapters available as accessories.

Technical Specifications - Graphics

Maximum Resolution	DisplayPort™ 1.4a: 7680x4320 @ 120Hz
Display Outputs	4x DP1.4a HDR2 outputs (up to 7680x4320 @ 120Hz)
GPU Architecture	NVIDIA® Ampere™
Supported Graphics APIs	DirectX®12, OpenGL® 4.5 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
Available Graphics Drivers	Windows 11 Windows 10 Windows 7 HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
	Factory Configured (Z4/Z6/Z8 G4 Workstation): No adapters included After market option kit: No adapters included

NVIDIA® RTX™ A6000 48GB Graphics	Form Factor	Full-Height Dual Slot (4.4"□ Height x 10.5"□ Length) Weight: 1230 grams / 2.71 lbs (with extender)
	Graphics Controller	NVIDIA® RTX™ A6000 Graphics GPU: 10752 NVIDIA® CUDA® Parallel Processing Cores Power: 300 Watts Cooling: Active
	Memory	48GB GDDR6 memory ECC optional Memory Bandwidth: Up to 768 GB/s Memory Width: 384 bit
	Connectors	4x DP 1.4a Quadro Sync II connector Ampere NVLink® Stereo Sync Requires 8-pin CPU auxiliary power
	Maximum Resolution	5120x2880 @ 60Hz (up to 4 displays)
	Display Outputs	4x DP 1.4 (7680x4320 @ 60Hz)
	Supported Graphics APIs	DirectX®12, OpenGL® 4.6, OpenCL™ 1.0, Vulkan™ 1.0 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran™
	Available Graphics Drivers	Windows 11 Windows 10 Linux® 64-bit HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html

Technical Specifications - Graphics

NVIDIA® Quadro® GV100 Form Factor 32GB Graphics	Dual Slot (4.4" Height x 10.5" Length) Weight: 980 grams + 72 gram extender
Graphics Controller	NVIDIA® QUADRO® GV100 GPU: 5120 NVIDIA® CUDA® Parallel Processing Cores Power: 250 Watts Cooling: Active
Memory	32GB HBM2 memory Memory Bandwidth: Up to 870 GB/s Memory Width: 5120-bit ECC Memory (disabled by default)
Connectors	DP (x4) with HDR support 3-pin mini-DIN connector via optional bracket 4-pin header for stereo signal Quadro Sync connector (compatible with Quadro II Sync) One 8-pin auxiliary power connector (2x) NVLink for GV100 connectors (via optional kit)
	After market option Kit: no power adapter included with card.
	DisplayPort™ to VGA, DisplayPort™ to DVI (single-link and dual-link), and DisplayPort™ to HDMI adapters available as accessories.
Maximum Resolution	5K support @ 60Hz 1x single-cable 5K monitor, or 2x dual-cable 5K monitors
Image Quality Features	HDR support over DisplayPort™ 1.4 (SMPTE 2084/2086, BT. 2020) (4K @ 60 Hz 10b/12b HEVC Decode, 4K @ 60 Hz 10b HEVC Encode) HDCP 2.2 support over DisplayPort™ and HDMI connectors NVIDIA 3D Vision™ technology NVIDIA Mosaic and nView Desktop Management
Display Outputs	4x DP1.4 HDR2 outputs (up to 5120 x 2880 @ 60Hz)
GPU Architecture	NVIDIA® Volta™
Supported Graphics APIs	DirectX®12, OpenGL® 4.5 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
Available Graphics Drivers	Windows 11 Windows 10 Windows 7 (via nvidia.com) Linux® 64-bit
	HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html

Technical Specifications - Graphics

Factory Configured (Z4/Z8 G4 Workstation): No adapters included
After market option kit: No adapters included

AMD Radeon™ Pro W5700 8GB Graphics	Form Factor	Dual Slot (4.4" Height x 10.5" Length)
	Graphics Controller	Radeon™ Pro W5700 graphics GPU: 2304 Stream Processors Power: 205 Watts Cooling: Active
	Memory	8GB GDDR6 memory Memory Bandwidth: Up to 448 GB/s Memory Width: 256 bit
	Connectors	5x MiniDisplayPort 1.4 + USB-C - HDR ready and MST support Factory Configured: No video cable adapter included After market option kit: 2x mDP-to-DP adapters included Additional DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as Factory Configuration or Option Kit accessories.
	Maximum Resolution	8K support @ 60Hz Single monitor, single or dual-cable
	Image Quality Features	Advanced support for 8-bit, 10-bit, and 16-bit per RGB color component. High bandwidth scaler for high quality up and downscaling
	Display Output	5 full physical mDP 1.4 + USB-c with DP signaling FreeSync support
	GPU Architecture	RDNA™
	Supported Graphics APIs	DirectX® 12.1 OpenGL® 4.6 OpenCL™ 2.0 Vulkan™ 1.1
	Available Graphics Drivers	Windows 11 Windows 10 Linux® 64-bit HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
	Notes	

Technical Specifications - Graphics

AMD Radeon™ Pro W5500	Form Factor	Single Slot (4.4"□ Height x 9.5"□ Length)
8GB Graphics	Graphics Controller	Radeon™ Pro W5500 graphics GPU: 1408 Stream Processors Power: 125 Watts Cooling: Active
	Memory	8GB GDDR6 memory Memory Bandwidth: Up to 224 GB/s Memory Width: 128 bit
	Connectors	4x DisplayPort 1.4 - HDR ready and MST support Factory Configured: No video cable adapter included After market option kit: No video cable adapter included Additional DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as Factory Configuration or Option Kit accessories.
	Maximum Resolution	8K support @ 60Hz Single monitor, single or dual-cable
	Image Quality Features	Advanced support for 8-bit, 10-bit, and 16-bit per RGB color component. High bandwidth scaler for high quality up and downscaling
	Display Output	4 full physical DP 1.4 FreeSync support
	GPU Architecture	RDNA™
	Supported Graphics APIs	DirectX® 12.1 OpenGL® 4.6 OpenCL™ 2.0 Vulkan™ 1.1
	Available Graphics Drivers	Windows 11 Windows 10 Linux® 64-bit HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
	Notes	

Technical Specifications - Graphics

AMD Radeon™ Pro W6600 8GB Graphics

Form Factor	Full height, Single Slot, 241mm length
Graphics Controller	AMD Radeon™ PR W6600 XT Graphics GPU: AMD RDNA 2 Memory: 8GB GDDR6 Power: 130 Watts, 6-pin Power Cable Cooling: Active, Dual Axial fan
Bus Type	PCI Express 4.0 x16
Connectors	4x DisplayPort 1.4 with DSC
Maximum Resolution	DisplayPort™ 1.4 with DSC: - up to 4x @ 3840x2160px (4K) - up to 4x @ 5120x2880px (5K) - up to 1x @ 7680x4320px (8K)
Display Outputs	4x DP
Shading Architecture	Microsoft DirectX 12 Shader Model 6.1
Supported Graphics APIs	OpenGL 4.6 DirectX 12 Feature Level 12_1 Vulkan 1.1 OpenCL 2.2
Available Graphics Drivers	Windows 11 Windows 10 Linux® 64-bit (selected distributions)

HP qualified drivers may be preloaded or available from the HP support Web site:
<http://welcome.hp.com/country/us/en/support.html>

AMD Radeon™ Pro W6800 32GB

Form Factor	Full-Height Double Slot
Graphics Controller	Architecture: RDNA 2 GPU Cores: 3840 Power: 261W Cooling: Active fan heatsink
Memory	32GB GDDR6 memory ECC Capable: Yes Memory Bandwidth: up to 512 GB/s Memory Interface: 256-bit
Display Output	Max Displays: 6 Video Output: 6x Mini-DisplayPort™ 1.4 with DSC Display Configurations: 5K Resolution: 6x @ 5120 x 2880 resolution @ 60Hz 8K Resolution: 2x @ 7680 x 4320 resolution @60Hz
	HDR Support: Yes 8K Support: Yes Notes: W6800 only has mini-DisplayPort™ (mDP) video ports
	<ul style="list-style-type: none">Configure-to-order must specify AV options to add any required mDP-to-DP AdaptersTwo mDP-to-DP Adapters are included in the RTX W6800 AMO kits

Technical Specifications - Graphics

- If more mDP-to-DP Adapters are needed, Adapters can be ordered separately as AMO:

- o 2MY05AA - HP Single miniDP-to-DP Adapter Cable

- o 2KW87A6 - HP (Bulk 12) miniDP-to-DP Adapter Cables

Bus Type PCI Express x16 Gen4

Software API Support
DirectX®: 12
OpenGL®: 4.6,
OpenCL™: 2.1
Vulkan: 1.2

Available Graphics Drivers Windows 11
Windows 10

HP qualified drivers may be preloaded or available from the HP support Web site:
<http://welcome.hp.com/country/us/en/support.html>

NVIDIA® Quadro® Sync II	Part number	1WT20AA
	Dimensions (HxD)	6.0 inches x 4.2 inches
	Devices Supported	NVIDIA® Quadro® P4000 NVIDIA® Quadro® P5000 NVIDIA® Quadro® P6000
	Bus Type	Requires one free mechanical PCIe bus slot. 6-pin PCI or SATA power connector
	PCI Form Factor	Full Height, half length, single slot
	Ports	2 RJ45 connectors for carrying frame lock signals over CAT5 cables. BNC Connector for external house synchronization.
	Internal Connectors	6 NVIDIA SLI® style edge fingers for connection to compatible GPUs <ul style="list-style-type: none">• Included with the board are 4 12-Inch Short Sync Cables to connect to GPU's• Included with the board are 2 24-Inch Long Sync Cables to connect to GPU's
	System Requirements	Requires one free mechanical PCIe bus slot. 6-pin PCI or SATA power connector Must be used with NVIDIA Quadro P4000, P5000 or P6000 graphics cards. Requires Quadro driver version R375 or later.
	Temperature - Operating	0° to 55° C
	Temperature - Storage	-40° to 60° C
	Relative Humidity - Operating	10% to 80%
	Power Requirements	Board power dissipation: <15W
	Operating Systems Supported	Windows 11 Windows 10 Windows 7 Linux® 64-bit

Technical Specifications - Graphics

Kit Contents

Contains:

- Quadro Sync II Card
- 4 x 12-Inch Short Sync Cables
- 2 x 24-Inch Long Sync Cables (Two)
- Quick Start Guide

Technical Specifications – Optical and Removable Storage

Optical and Removable Storage

HP 9.5mm Slim DVD Writer	Description	9.5mm height, tray-load
	Mounting Orientation	Either horizontal or vertical
	Interface Type	SATA/ATAPI
	Dimensions (WxHxD)	128 x 9.5 x 127mm
	Supported Media Types	DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW
	Disc Capacity	DVD-ROM 8.5 GB DL or 4.7 GB standard Full Stroke DVD < 200 ms (seek) Full Stroke CD < 200 ms (seek)
	Maximum Data Transfer Rates	CD ROM Read CD-ROM, CD-R Up to 24X CD-RW Up to 24X
		DVD ROM Read DVD+RW Up to 8X DVD-RW Up to 8X DVD+R DL Up to 8X DVD-R DL Up to 8X DVD-ROM Up to 8X DVD-ROM DL Up to 8X DVD+R Up to 8X DVD-R Up to 8X
	Power	Source SATA DC power receptacle DC Power Requirements 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC < 800 mA typical, <1600 mA maximum
	Operating Environmental (all conditions non-condensing)	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)
	Operating Systems Supported	Windows 11, Windows 10, Windows 7 Professional 64-bit, Windows Vista Business 64*, Windows 2000. Red Hat® Enterprise Linux® (RHEL) 6, 7 Desktop/Workstation SUSE Linux® Enterprise Desktop 12
	<p>* No driver is required for this device. Native support is provided by the operating system.</p>	
	Kit Contents	HP SATA DVD Writer drive, installation guide.

Technical Specifications – Optical and Removable Storage

HP 9.5mm Slim DVD-ROM Drive	Description	9.5mm height, tray-load
	Mounting Orientation	Either horizontal or vertical
	Interface Type	SATA / ATAPI
	Dimensions (WxHxD)	128 x 9.5 x 127mm
	Disc Capacity	DVD-ROM Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB
	Access Times	DVD-ROM Single Layer < 110 ms (typical) CD-ROM Mode 1 < 110 ms (typical) Full Stroke DVD < 230 ms (typical) Full Stroke CD < 220 ms (typical)
	Power	Source SATA DC power receptacle DC Power Requirements 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC - <800mA typical, < 1600 mA maximum
	Operating Environmental (all conditions non-condensing)	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)
	Operating Systems Supported	Windows 11, Windows 10, Windows 8.1, Windows 7 Professional 64-bit Red Hat® Enterprise Linux® (RHEL) 6, 7 Desktop/Workstation SUSE Linux® Enterprise Desktop 12
		No driver is required for this device. Native support is provided by the operating system.
	Kit Contents	9.5mm Slim DVD-ROM Drive, 5.25" ODD Bay adapter/carrier, slim SATA data/power cable, installation guide

HP HH DVD Writer (16X RW DVD-R)	Description	HP Half Height DVD Writer
	Mounting Orientation	Either Horizontal or vertical
	Interface Type	SATA
	Dimensions (WxHxD)	146x42x165mm
	Supported Media Types	DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW
	Disc Capacity	DVD-ROM 8.5 GB DL or 4.7 GB standard Full Stroke DVD 145ms (seek) Full Stroke CD 120ms (seek)
	Maximum Data Transfer Rates	CD ROM Read CD-ROM, CD-R Up to 24X CD-RW Up to 24X DVD ROM Read DVD+RW Up to 13X

Technical Specifications – Optical and Removable Storage

		DVD-RW Up to 13X DVD+R DL Up to 12X DVD-R DL Up to 12X DVD-ROM Up to 12X DVD-ROM DL Up to 12X DVD+R Up to 16X DVD-R Up to 16X
Power	Source	SATA DC power receptacle
	DC Power Requirements	5 VDC ± 5% -100 mV ripple p-p 12 VDC ± 10% -200 mV ripple p-p
	DC Current	5 VDC <1500mA typical, <2000 mA maximum.
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90% (Non-Condensing)
Operating Systems Supported	Windows 11, Windows 10, Windows 7 Professional 64-bit. Red Hat Enterprise Linux WS4**,5,6 Desktop/Workstation.	
		No driver is required for this device, Native support is provided by operating system.
Kit Contents	HP SATA DVD Writer drive, Installation guide.	

HP 9.5mm Slim BDXL Blu-Ray Writer	Description	9.5mm height, tray-load
	Mounting Orientation	Either horizontal or vertical
	Interface Type	SATA/ATAPI
	Dimensions (WxHxD)	128 x 9.5 x 127mm
	Supported Media Types	BD-ROM BD-R BD-RE DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW
	Disc Capacity	DVD-ROM 8.5 GB DL or 4.7 GB standard Blu-ray 25 GB (single-layer) 50 GB (dual-layer) 100/128 GB (BDXL) Full Stroke DVD < 230 ms (seek) Full Stroke CD < 220 ms (seek) Blu-ray < 230 ms (seek) (Full Stroke Blu-ray) Startup Time (Time to drive ready from tray loading) BD-ROM (SL/DL) 25S / 28S BD-R (SL/DL) 25S / 28S BD-RE (SL/DL) 25S / 28S

Technical Specifications – Optical and Removable Storage

Maximum Data Transfer Rates	CD ROM Read	DVD-ROM (SL/DL) 18S / 18S DVD-R (SL/DL) 25S / 25S DVD-RW 25S DVD+R (SL/DL) 25S / 25S DVD+RW 25S CD-ROM 15S
	DVD ROM Read	DVD+RW Up to 8X DVD-RW Up to 8X DVD+R DL Up to 8X DVD-R DL Up to 8X DVD-ROM Up to 8X DVD-ROM DL Up to 8X DVD+R Up to 8X DVD-R Up to 8X
	Blu-ray	BD-ROM Up to 6X BD-ROM DL Up to 6X BD-R Up to 6X BD-R DL Up to 6X BD-R Up to 6X BD-RE SL/DL Up to 6X
Power	Source	SATA DC power receptacle
	DC Power Requirements	5 VDC ± 5%-100 mV ripple p-p
	DC Current	5 VDC -900 mA typical, 2000mA maximum
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature	84° F (29° C)
Operating Systems Supported	Windows 11, Windows 10, Windows 7 Professional 64-bit, Red Hat® Enterprise Linux® (RHEL) 6, 7 Desktop/Workstation SUSE Linux® Enterprise Desktop 12	
		No driver is required for this device. Native support is provided by the operating system.
Kit Contents	9.5mm Slim BDXL Blu-Ray Writer, 5.25" ODD Bay adapter/carrier, slim SATA data/power cable, installation guide	As Blu-ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

Technical Specifications – Optical and Removable Storage

HP SD Card Reader	Description	Supports hardware ECC (Error Correction Code) function Supports hardware CRC (Cyclic Redundancy Check) function Supports SD 4-bit parallel transfer mode
	Interface Type	USB 3.1 Gen 1 High-speed interface
	Dimensions (WxHxD)	1.15 x .9 x .15 in (29.00 x 23.6 x 3.15 mm) Fits conveniently in the Front IO Bay
	Supported Media Types	Secure Digital Card (SD) Secure Digital High Capacity (SDHC) SD Extended Capacity Memory Card (SDXC) SD Ultra High Speed II (SD UHSII)
		These additional media types are supported with a card adapter. Memory Stick Micro (M2) miniSD miniSD High Capacity Micro SD Memory Card (MicroSD) Micro SD High Capacity Memory Card (MicroSDHC)
		Test Parameters/Conditions - Power applied, unit operating on system ±5%
Operating Systems Supported	Windows 11, Windows 10	
		No driver is required for this device. Native support is provided by the operating system.
Kit Contents	Media card reader	
Approvals	USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.3, FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV	
Weight	0.35 lbs. (0.16 kg)	

Technical Specifications - Controller Cards

Controller Cards


HP Thunderbolt-3 Dual Port2 PCIe 1-port I/O Card	Data Transfer Rate	Supports up to 40 Gb/s (40,000 Mb/s)
	Devices Supported	Thunderbolt™, Thunderbolt™ 2 and Thunderbolt™ 3 certified for Windows devices
	Bus Type	PCIe card, full height PCIe slots
	Ports	Two Thunderbolt™ 3 external USB type-C output connectors (Rear) Two full size DisplayPort input connectors (Rear)
	Internal Connectors	One 2x5-Pin header connector
	System Requirements	Windows 11, Windows 10 Professional, available dedicated PCH PCIe slot.
	Temperature - Operating	50° to 131° F (10° to 55° C)
	Temperature - Storage	-22° to 140° F (-30° to 60° C)
	Relative Humidity - Operating	20% to 80%
	Compliances	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	Operating Systems Supported	Windows 11, Windows 10 Professional.
	Kit Contents	HP Thunderbolt™ 3 Dual Port PCIe I/O Card, 2- DisplayPort cables, GPIO (General-Purpose Input/Output) cables, Installation documentation and warranty card.

*Maximum speed requires DisplayPort™ and PCIe aggregation.

Technical Specifications - Networking and Communications

Networking and Communications

HP Z6 Gen4 and HP Z8 Gen 4 Integrated Network Architecture

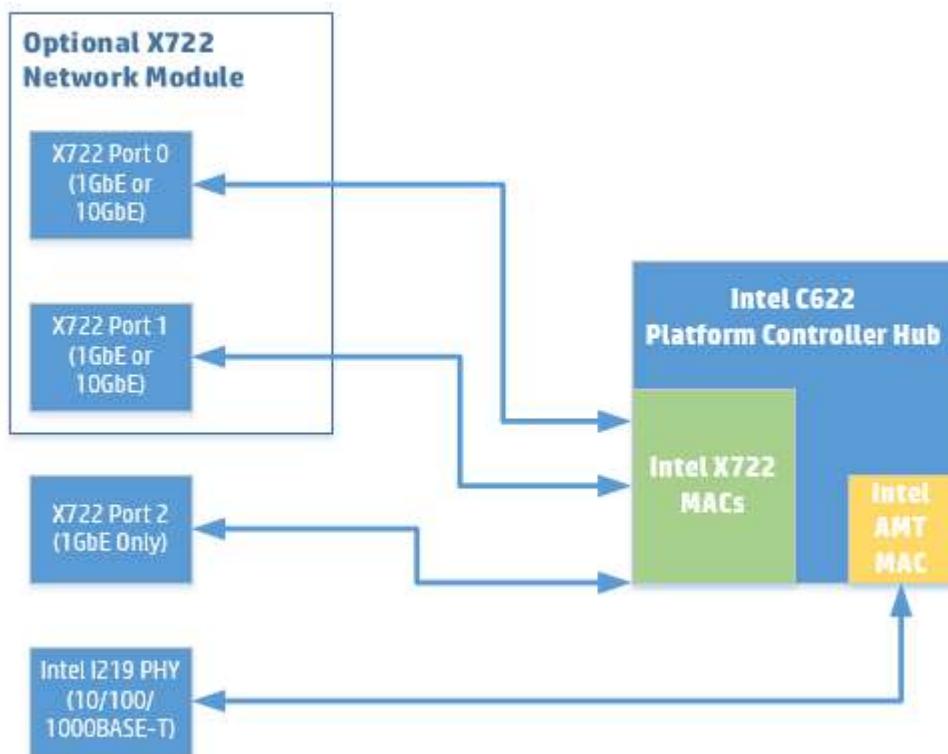

Note: When an optional X722 network module is not installed in the system, a "dummy" port is enumerated as Function 0 of the Intel X722 MACs, which allows for the X722 Port 2 on the Motherboard to enumerate.

Integrated Intel I219LM	Connector	RJ-45
	Controller	Intel I219LM
	Data Rates Supported	10/100/1000 Mbps
	Boot ROM Support	PXE, UEFI
	Connect Speed LED Indicators	<ul style="list-style-type: none">• Off = No link• Blinking = Activity Speed LED <ul style="list-style-type: none">• Off = 10Mbps• Amber = 100Mbps• Green = 1000Mbps

Technical Specifications - Networking and Communications

Management Capabilities Intel ® Active Management Technology™ 11

Integrated Intel X722 for 1GbE	Connector	1 RJ-45
	Controller	Intel X722 for 1GbE
	Data Rates Supported	1000 Mbps
	Boot ROM Support	PXE, UEFI
	Connect Speed LED Indicators	<ul style="list-style-type: none">• Off = No link• Blinking = Activity Speed LED
		<ul style="list-style-type: none">• Off = No Link• Green = 1000Mbps

Management Capabilities Wake-On-LAN

HP Z Dual 10GbE Network Module	Networking Interface	2 RJ-45
	System Interface	Cabled from Dedicated Rear I/O Slot
	Networking Speeds Supported	1Gbps, 10Gbps
	Cabling (up to 100m)	Cat5e (or higher) for 1Gbps Cat6a (or higher) for 10Gbps
	Power Consumption (active-typical)	5.5W at 1Gbps 11.2W at 10Gbps
	Physical Dimensions	0.875 in x 3 in x 2.75 in
	Connect Speed LED Indicators	<ul style="list-style-type: none">• Off = No link• Blinking = Activity Speed LED
		<ul style="list-style-type: none">• Amber = 1Gbps• Green = 10Gbps
	Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)

Technical Specifications - Networking and Communications

Intel® I210-T1	Networking Interface	1 RJ-45
	System Interface	PCI Express 2.1 x1
	Networking Speeds Supported	10Mbps, 100Mbps, 1Gbps
	Cabling (up to 100m)	Cat3 (or higher) for 10Mbps Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps
	Power Consumption (active-typical)	0.81W
	Physical Dimensions	Length: 6.7cm (2.64 inches) (Bracket) Width: 1.8cm (0.709 inches) Full-height end bracket: 12.07cm (4.755 inches) Low-profile end bracket: 8cm (3.15 inches)
	Connect Speed LED Indicators	Link/Activity LED <ul style="list-style-type: none">• Off = No link• Blinking = Activity Speed LED <ul style="list-style-type: none">• Off = 10Mbps• Green = 100Mbps• Amber = 1Gbps
	Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)
	Hardware Certifications	USA: FCC B, EU: UL CE, Japan: VCCI, Taiwan: BSMI, Australia/New Zealand: CTICK, Korea: KCC, Canada: ICES-003/NMB-003

Intel® I350-T2	Networking Interface	2 RJ-45
	System Interface	PCI Express 2.1 x4
	Networking Speeds Supported	10Mbps, 100Mbps, 1Gbps
	Cabling (up to 100m)	Cat3 (or higher) for 10Mbps Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps
	Power Consumption (active-typical)	4.4W
	Physical Dimensions	Length: 13.54cm (5.33 inches) Width: 6.89 (2.71 inches) Full-height end bracket: 12.0cm (4.725 inches) Low-profile end bracket: 7.92cm (3.117 inches)
	Connect Speed LED Indicators	Link/Activity LED <ul style="list-style-type: none">• Off = No link• Blinking = Activity Speed LED

Technical Specifications - Networking and Communications

- Off = 10Mbps
- Green = 100Mbps
- Amber = 1Gbps

Operating Temperature 0 °C to 55 °C (32 °F to 131 °F)

Hardware Certifications USA: FCC B,
EU: UL CE,
Japan: VCCI,
Taiwan: BSMI,
Australia/New Zealand: CTICK,
Korea: KCC,
Canada: ICES-003/NMB-003

Intel® I350-T4	Networking Interface	4 RJ-45
	System Interface	PCI Express 2.1 x4
	Networking Speeds Supported	10Mbps, 100Mbps, 1Gbps
	Cabling (up to 100m)	Cat3 (or higher) for 10Mbps Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps
	Power Consumption (active-typical)	5W
	Physical Dimensions	Length: 13.54cm (5.33 inches) Width: 6.89 (2.71 inches) Full-height end bracket: 12.0cm (4.725 inches) Low-profile end bracket: 7.92cm (3.117 inches)
	Connect Speed LED Indicators	Link/Activity LED Speed LED <ul style="list-style-type: none">• Off = No link• Blinking = Activity
		<ul style="list-style-type: none">• Off = 10Mbps• Green = 100Mbps• Amber = 1Gbps
	Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)
	Hardware Certifications	USA: FCC B, EU: UL CE, Japan: VCCI, Taiwan: BSMI, Australia/New Zealand: CTICK, Korea: KCC, Canada: ICES-003/NMB-003

Technical Specifications - Networking and Communications

Aquantia® AQN-108	Networking Interface	RJ-45
	System Interface	PCI Express 3 x1
	Networking Speeds Supported	100Mbps, 1Gbps, 2.5Gbps, 5Gbps
	Cabling (up to 100m)	Cat5e (or higher) for all speeds
	Power Consumption (active-typical)	3.5W at 5Gbps, 3.0W at 2.5Gbps
	Physical Dimensions	3.72 in x 3.18 in (without bracket)
	Connect Speed LED Indicators	<p>Link/Activity LED</p> <ul style="list-style-type: none">• Off = No link• Blinking = Activity <p>Speed LED</p> <ul style="list-style-type: none">• Off = No link• Amber = <5Gbps• Green = 5Gbps
	Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)
	Hardware Certifications	USA: FCC B, EU: UL CE, Japan: VCCI, Taiwan: BSMI, Australia/New Zealand: CTICK, Korea: KCC, Canada: ICES-003/NMB-003

Intel® X550-T2	Networking Interface	2 x RJ-45
	System Interface	PCI Express 3 x4
	Networking Speeds Supported	100Mbps, 1Gbps, 2.5Gbps, 5Gbps, 10Gbps
	Cabling (up to 100m)	Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps, 2.5Gbps, or 5Gbps Cat6a (or higher) for 10Gbps
	Power Consumption (active-typical)	3.9W at 100Mbps 5.5W at 1Gbps 11.2W at 10Gbps
	Physical Dimensions	5.2 in x 2.7 in (without bracket)
	Connect Speed LED Indicators	<p>Link/Activity LED</p> <ul style="list-style-type: none">• Off = No link• Blinking = Activity <p>Speed LED</p> <ul style="list-style-type: none">• Off = No link• Amber = <10Gbps• Green = 10Gbps

Technical Specifications - Networking and Communications

Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)
Hardware Certifications	USA: FCC B, EU: UL CE, Japan: VCCI, Taiwan: BSMI, Australia/New Zealand: CTICK, Korea: KCC, Canada: ICES-003/NMB-003
Allied Telesis AT-2914SX/LC-901 1GB LC Fiber NIC	Network Interface 1Gb LC Fiber 850 nm System Interface PCIeG2 x1, Half Height, Half Length Networking Speeds 1000Base-X (1Gbps) Supported Cabling 50/125 µm (core/cladding) multimode fiber optic cable up to 500m 62.5/125 µm (core/cladding) multimode fiber optic cable up to 220m Power Consumption (active-typical) 1.5 Watts Physical Dimensions 8.8 cm x 6.9 cm (3.5 in x 2.7 in) Connect Speed LED ON: 1Gbps Link OFF: Link down Indicators Operating Temperature -25°C to 70°C (-13°F to 158°F) Hardware Certifications IEEE 802.1p (Quality of Service), IEEE 802.1Q (VLANs), IEEE 802.2 (LLC), IEEE 802.3ac (MAC), IEEE 802.3x (Flow control auto-negotiation), IEEE 802.3z (1000 Base-X), IEEE 802.3ad (Link aggregation) RoHS, UL, FCC/EN55022 Class A, TUV, EN55024, CE, C-TICK, VCCI

Allied Telesis AT-2911T/2-901	Networking Interface 2 RJ-45 System Interface PCI Express 3 x1 Networking Speeds 10Mbps, 100Mbps, 1Gbps Supported Cabling (up to 100m) Cat3 (or higher) for 10Mbps Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps Power Consumption (active-typical) 2.4W Physical Dimensions Length: 8.8cm (3.5 inches) Width: 6.89 (2.71 inches) Full-height end bracket: 12.0cm (4.725 inches) Low-profile end bracket: 7.92cm (3.117 inches) Connect Speed LED Link/Activity LED Indicators <ul style="list-style-type: none">• Off = No linkBlinking = Activity Operating Temperature 0 °C to 40 °C (32 °F to 104 °F) Hardware Certifications USA: FCC B, EU: UL CE, UKCA
--------------------------------------	--

Technical Specifications - Networking and Communications

Japan: VCCI,
Taiwan: BSMI,
Australia/New Zealand: CTICK,
Korea: KCC,
Canada: ICES-003/NMB-003

Intel® X710-DA2 10GBASE-SR Converged Network Adapter	Networking Interface	2 SFP+ Ports for LC SFP+ Transceivers
	System Interface	PCI Express 3.0 x8
	Networking Speeds Supported	10Gbps (or 1Gbps with 3 rd party transceiver)
	Cabling	LC fiber optic cabling with LC SFP+ Transceivers
	Power Consumption (active-typical)	4.3W
	Physical Dimensions	6.578 in x 2.703 in
	Connect Speed LED Indicators	<ul style="list-style-type: none">• Off = No link• Blinking = Activity <p>Speed LED</p> <ul style="list-style-type: none">• Off = 10Mbps• Green = 100Mbps• Amber = 1Gbps
	Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)
	Hardware Certifications	USA: FCC B, EU: UL CE, Japan: VCCI, Taiwan: BSMI, Australia/New Zealand: CTICK, Korea: KCC, Canada: ICES-003/NMB-003

NOTE: Windows 7 is NOT supported

Technical Specifications - Networking and Communications

10GbE SFP+ SR Transceiver	Connector Type	LC
	Cable Type	62.5/125um or 50/125um (core/cladding), graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively.
	Cable Length	2-300m
	Wavelength	850nm
	Form Factor	SFP+
	Physical Dimensions	0.47(h) x 0.54(w) x 2.19(d) inches (1.19 x 1.38 x 5.57 cm)
	Operating Temperature	0C to 45C (32F to 113F)
	Operating Humidity	0% to 85%, noncondensing

NVIDIA® Mellanox® ConnectX-6 DX Dual Port 10/25GbE SFP28 NIC	Connector	2 x SFP28 Transceiver Cage (Dual Port)*
	Cabling	Depends on transceiver pairing. Typically OM4 or higher MMF LC fiber optic cabling with LC SFP28 Transceivers.
	Controller	ConnectX6-DX
	Memory	256Mbit SPI Quad Flash Device
	Data Rates Supported	1/10/25GbE
	Compliance	<ul style="list-style-type: none">- IEEE 802.3by 25 Gigabit Ethernet- IEEE 802.3ae 10 Gigabit Ethernet- IEEE 802.3ap based auto-negotiation and KR startup- IEEE 802.3ad, 802.1AX Link Aggregation- IEEE 802.1Q, 802.1P VLAN tags and priority- IEEE 802.1Qau (QCN)- Congestion Notification- IEEE 802.1Qaz (ETS)- IEEE 802.1Qbb (PFC)- IEEE 802.1Qbg- IEEE 1588v2- Jumbo frame support (9.6KB)- Safety: CB/cTUVus/CE- EMC: CE/FCC/VCCI/ICES/RCM- RoHS Compliant
	Bus Architecture	PCIe Gen 4 x8
	Data Transfer Mode	PCI Express - stores and accesses Ethernet fabric connection information and packet data
	Power Requirements	11.5 Watts (typical)
	Network Transfer Rate	1Gbps, 10Gbps, 25Gbps

NOTE: Network Transfer Rate depends on transceiver model.*

Kit Contents NVIDIA® Mellanox® ConnectX-6 DX Dual Port 10/25GbE SFP28 NIC

*Transceivers sold separately. You must have a transceiver installed in order to connect this card to a network.

Technical Specifications - Networking and Communications

Intel® 8265 WLAN	Networking Speeds	802.11ac MU-MIMO (up to 867 Mbps) Bluetooth 4.2
	IEEE WLAN Standard	IEEE 802.11a/b/g/n/ac, 802.11d, 802.11e, 802.11h, 802.11i, 802.11w; 802.11r, 802.11k, 802.11v pending
	Bluetooth	4.2
	System Interface	PCI Express 2.1 x1
	Antenna	2x2
<hr/>		
Intel® 9260 WLAN	Networking Speeds	802.11ac MU-MIMO (up to 1.73Gbps using 160MHz channels)
	IEEE WLAN Standards	IEEE 802.11a/b/g/n/ac
	Bluetooth	5.0
	System Interface	PCI Express 2.1 x1
	Antenna	2x2

Summary of Changes

Summary of Changes

Date of change:	Version History:	Description of change:
September 20, 2017	From v1 to v2	Added Specs for the Power Supply section
		Changed The System Configurations section and changed notes for the NVIDIA Quadro P4000, P5000 & P6000 Graphics
November 1, 2017	From v2 to v3	Added HP DisplayPort to HDMI Adapter, NVIDIA SLI 2-slot Graphics Connector and NVIDIA Quadro Sync II to Graphics section
		Changed Graphics, Storage / Hard Drives, Networking and Communications, Other Hardware and Memory sections, changed Front view info on the Overview section, changed Operating Systems section, changed Processors section, changed System Board section, Physical Security and Serviceability section
November 10, 2017	From v3 to v4	Added Windows 10 to the supporting systems by the 9.5mm Slim DVD-ROM drive
		Removed Microsemi 3152-8i SAS ROC RAID Controller from SAS controller on the Hard Drive Controllers section.
November 29, 2017	From v4 to v5	Added Processors, hard drives and graphics to offerings, added Declared Noise Emissions information
		Changed Wattage links on power supply section updated and Voltage links on efficiency section updated
January 30, 2018	From v5 to v6	Changed Factory configured option to yes on Networking and communications for : Intel® 8265 802.11 a/b/g/n/ac&BT PCIe
		Removed NVIDIA SLI Graphics Connector from Graphics Cable Adapters section
February 14, 2018	From v6 to v7	Removed RAID 5 and 10 references from "Factory integrated" in interfaces supported section
March 27, 2018	From v7 to v8	Added NVIDIA Quadro GP100 16GB Graphics, NVIDIA Quadro GV100 32GB Graphics and AMD Radeon Pro WX 9100 16GB Graphics as High End 3D in Graphics section
		Added Intel Xeon processors added
August 13, 2018	From v8 to v9	Added Footnote to Networking and Communications section
		Changed Operating Systems section
September 6, 2018	From v9 to v10	Added Integrated Network Architecture Diagram on The Networking and Communications section
September 6, 2018	From v10 to v11	Changed Power Supply section
September 21, 2018	From v11 to v12	Added Intel Optane SSD 905p AIC 280GB & 480GB
November 19, 2018	From v12 to v13	Added Intel Xeon Gold 6128 processor
		Changed NVIDIA Quadro P6000 Graphics specs
January 2, 2019	From v13 to v14	Added NVIDIA Quadro P620 2GB Graphics
January 8, 2019	From v14 to v15	Added HP DX175 Removable HDD Carrier into the HDD Frame/Carriers section
		Changed Intel Xeon Gold 6126 processor specs
January 9, 2019	From v15 to v16	Added Intel Xeon Gold 6126 processor footnote
January 23, 2019	From v16 to v17	Added Intel 9260 802.11 a/b/g/n/ac&BT PCIe to Networking section and added HP Z Turbo Drive Dual Pro series to Storage section
April 8, 2019	From v17 to v18	Added New Intel Xeon Processors and graphics
		Changed Storage / Hard Drives, Memory sections and format changes
May 15, 2019	From v18 to v19	Added NVIDIA Quadro RTX 8000 48GB Graphics
		Changed Networking and Communications section and changed External BIOS simulator link on Physical Security and Serviceability section
June 12, 2019	From v19 to v20	Changed Storage section
July 15, 2019	From v20 to v21	Changed Corrected Intel 905p Series AIC 480GB PCIe SSD
August 1, 2019	From v21 to v22	Changed Processors Matrix
August 6, 2019	From v22 to v23	Changed Graphics section
September 1, 2019	From v23 to v24	Added Footnote to Memory section, Added Optane 905P 380GB M.2 SSD Module, HP Z Turbo Drive 1TB SED TLC Z8 G4 SSD Kit & module to Storage section, Added Intel® Wi-Fi 6 AX200 & BT PCIe to Networking section

Summary of Changes

October 26, 2019	From v24 to v25	Changed	Graphics section
November 2, 2019	From v25 to v26	Added	NVDIMM Memory sections, Added HP QX310 Removable NVMe Frame/Carrier w/PCIe card to Optical and Removable Storage section
January 15, 2020	From v26 to v27	Changed	Storage section
February 26, 2020	From v27 to v28	Added	New Intel Xeon Processors
		Changed	Overview, PCIe Solid State Drives sections
April 2, 2020	From v28 to v29	Changed	Processors and NVDIMM Memory sections
July 18, 2020	From v29 to v30	Changed	Processors, Graphics section
January 5, 2021	From v30 to v31	Changed	Processors, Memory, Graphics, Racking and Physical Security, Operating Systems and Hard Drives sections
January 7, 2021	From v31 to v32	Changed	Format
February 1, 2021	From v32 to v33	Added	NVIDIA® RTX A6000 48GB to Graphics section
		Changed	NETWORKING AND COMMUNICATIONS section
March 1, 2021	From v33 to v34	Changed	Overview, Graphics and System Board sections
April 13, 2021	From v34 to v35	Changed	Graphics and Social and Environmental Responsibility sections
May 1, 2021	From v35 to v36	Changed	Graphics section
May 20, 2021	From v36 to v37	Changed	Graphics section
June 1, 2021	From v37 to v38	Changed	Memory and Graphics sections
July 1, 2021	From v38 to v39	Changed	Graphics section
July 15, 2021	From v39 to v40	Changed	PCIe Solid State Drives section
July 16, 2021	From v40 to v41	Changed	PCIe Solid State Drives section
August 1, 2021	From v41 to v42	Changed	Graphics section
October 1, 2021	From v42 to v43	Changed	Input Devices, Graphics and System Board sections
November 1, 2021	From v43 to v44	Changed	Processors and Graphics sections
December 1, 2021	From v44 to v45	Changed	Operating Systems, Graphics, Networking and Communications and Input Devices sections
December 15, 2021	From v45 to v46	Changed	OPERATING SYSTEM and Social and Environmental Responsibility sections
January 1, 2022	From v46 to v47	Changed	Graphics, OPERATING SYSTEM and Application Software sections
February 1, 2022	From v47 to v48	Added	Intel® Xeon® Gold 6234 to Processors section
		Changed	Input Devices section
March 1, 2022	From v48 to v49	Changed	Graphics, Social and Environmental Responsibility sections
April 1, 2022	From v49 to v50	Changed	Processors, Graphics and Stable & Consistent Offerings sections
May 2, 2022	From v50 to v51	Changed	Graphics section
June 1, 2022	From v51 to v52	Changed	SATA Hard Drives, Graphics, Networking and Communications sections
July 1, 2022	From v52 to v53	Changed	Graphics section
August 1, 2022	From v53 to v54	Changed	NETWORKING AND COMMUNICATIONS section
September 1, 2022	From v54 to v55	Changed	Format page 18
October 1, 2022	From v55 to v56	Changed	Graphics section
December 1, 2022	From v56 to v57	Changed	Input Devices section
December 9, 2022	From v57 to v58	Changed	Optical and Removable Storage section
January 1, 2023	From v58 to v59	Changed	Networking and Communications, GRAPHICS sections
February 22, 2023	From v59 to v60	Changed	Graphics section
March 1, 2023	From v60 to v61	Changed	Manageability section
April 1, 2023	From v61 to v62	Changed	Processors and Graphics sections
May 1, 2023	From v62 to v63	Changed	Other Hardware section
June 1, 2023	From v63 to v64	Changed	Graphics section
July 1, 2023	From v64 to v65	Changed	Networking and Communications, Other Hardware sections
August 1, 2023	From v65 to v66	Changed	Social and Environmental Responsibility section
November 1, 2023	From v66 to v67	Changed	Social and Environmental Responsibility section
April 1, 2024	From v67 to v68	Changed	Other Hardware section
June 12, 2024	From v68 to v69	Changed	Application Software section
September 26, 2024	From v69 to v70	Changed	Maximum Altitude section

title

© 2024 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and Thunderbolt are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Red Hat is a registered trademark of Red Hat, Inc. in the United States and other countries. Firewire is a trademark of Apple Inc. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. Bluetooth is a trademark of its proprietor used by HP Inc. under license.